


# SPECTAR TECHNICAL MANUAL

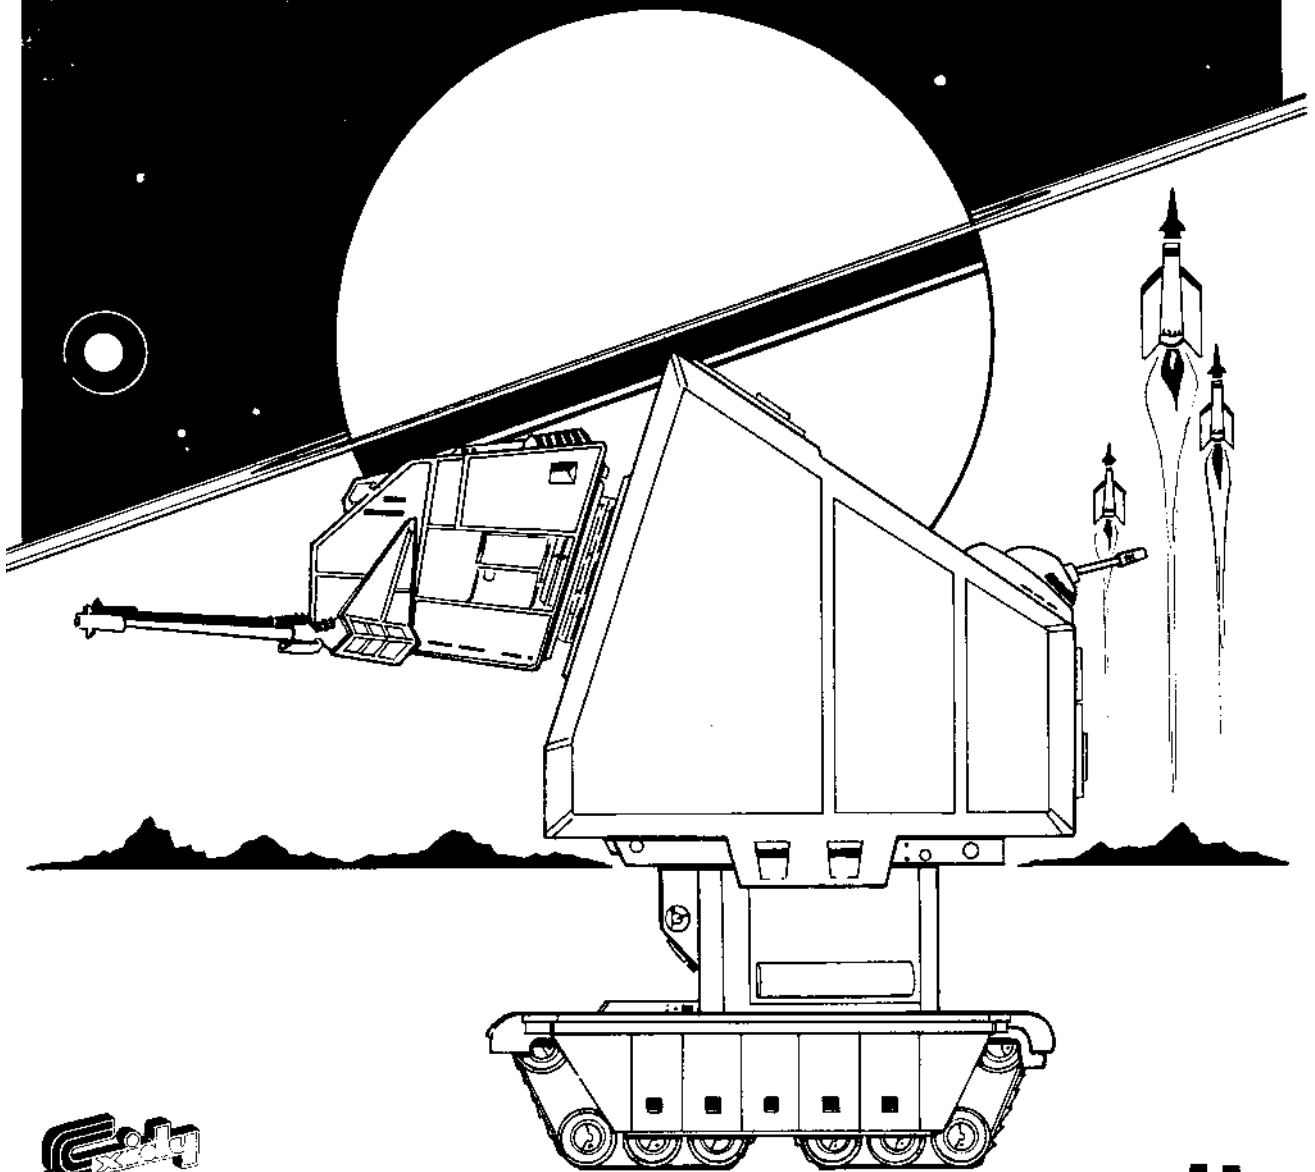

SPECTAR (TM)

Technical Manual 1.1

(c) 1980 Exidy, Inc.  
390 Java Drive, Sunnyvale, California 94086  
Telephone: (408) 734-9410  
Toll-free: (800) 533-8402  
Telex: 357-499

#### FOREWARD

This manual is designed for your ease in reading schematics. A description accompanies each schematic on the opposite page. This should help clarify the schematics and aid in your understanding of the technical aspects of SPECTAR.

The following is an outline of the information contained in the schematic descriptions: To find the particular information you are interested in, look up the schematic PAGE number as listed, and opposite the schematic is additional verbal explanation.

PAGE 4, GAME LOGIC PCB

1. The 6502 Microprocessor (2A)
2. Power-on Reset circuit (connected to 2A pin 40)
3. Processor Workspace RAM (4A, 5A)
4. Main Address Decoding (5C, 5D, 5E)

Memory Map

PAGE 5, GAME LOGIC PCB

1. Program Memory (6A through 13A)
2. PROM Address Selection (4B, 5B)
3. Memory Device "Personality" Selection (11B)

PAGE 6, GAME LOGIC PCB

1. Moving Object Horizontal Position (13F, 14F, 15F, 16F)
2. Moving Object Vertical Position Counters (16E, 12E, 1E, 13E)
3. "Write Moving Object" Decoding (6F, 16H, 5E, 3F)
4. Color Interface Output (16B)

PAGE 7, GAME LOGIC PCB

1. Moving Object Multiplexing (14A, 14E)
2. Moving Objects Image PROM (11D)
3. Moving Object Video Output Shift Registers (12D, 13D, 14D, 15D)
4. Moving Objects Shift Register Load Logic (2F, 16H)
5. Moving Object Shift Register Control Logic (15H, 14H)
6. Memory Device Personality Configuration (10D)

PAGE 8, GAME LOGIC PCB

1. Interrupt Status Latch (8E)
2. Option Switch Port (15A)
3. Control Inputs Port (9E)
4. Moving Image Latch
5. Audio Board Port
6. Control Port Latch (9D)
7. I/O Decoding (7E)

PAGE 1, COLOR ADAPTER BOARD

1. Character Generator RAM Division (1A, 2A)
2. Video Priorization
3. Color Multiplexers (5A, 5B, 5C)
4. SYNC and VIDEO Polarity (JPR1, JPR2)
5. Output Level Adjustments (6C, 7A, 7C)

APPENDIX A: PARTS LIST FOR SPECTAR

# SCHEMATICS

## GAME LOGIC PCB

### 1. Master Oscillator (1D)

From this oscillator all dynamic operations are derived, such as the processor clock, the main element and line counters, the shift register clocks, as well as all other forms of timing signals.

### 2. Element (Horizontal) Counters (1C, 1E, 2E)

These components form the final stages of horizontal timing. All operations in this game requiring horizontal positioning or timing have their origin here. Note that, beginning with signal HCLK (from Clock Divide Counter 2D), there are 256 counts prior to setting signal E256 high. When this signal goes high, it indicates that the horizontal blanking period is in progress. At this time the final counter (1E) is preloaded with a higher number than previously loaded. This creates a shorter count the second time around. The shorter count measures the retrace interval. When the retrace count is finished, the counter preloads with a lower number, establishing a longer count sequence again for "real time" sweep of the electron beam across the face of the CRT.

### 3. Line (Vertical) Counters (4F, 5F, 6E)

These components form the entire vertical timing operation starting with a clock derived from horizontal timing. These counters count 256 times and then preload with a higher number, causing a shorter count the second time. This shorter count measures the vertical retrace interval. Note that signal L256, when high, indicates vertical blanking is in progress. After the completion of the vertical retrace count, the counters once again preload with a lower number. This way they count 256 times during the sweep of the electron beam down the face of the CRT, allowing the horizontal timers to sweep one complete horizontal line for each count of the vertical counters. Thus, the electron beam reaches the bottom of the CRT, after completing 256 horizontal line sweeps. It then begins the vertical retrace count, and the whole cycle begins anew with the beam starting again at the top of the CRT.

### 4. Screen RAM Addresses (7D)

During the time the screen RAM is examined by the logic for output to the monitor screen, addresses must be applied to the screen RAM to count up at a rate corresponding to the image cells conceptually arranged on the screen in a 32 x 32 matrix. The counts used here, 4 from the element counters, and 4 from the line counters, fulfill this timing requirement. The least significant element count used (E8) represents an interval exactly eight times that of one element. The least significant line count used represents an interval exactly eight times that of one horizontal line, or eight times a single line count. Dividing a 256 element line by 8 yields 32, and likewise dividing a 256 line vertical sweep by 8 yields 32. Thus the screen RAM address lines (RAM0 through RAM9) count at a rate that creates 32 horizontal counts and 32 vertical counts as the electron beam sweeps the face of the CRT. This makes 1024 conceptual "image cells" into which can then be inserted images of 8 elements by 8 lines. For more information concerning these images, refer to the text for page 3 of the Logic Schematics.

### 5. Coin Input Decoding (1H)

Some models of SPECTAR contain two separate coin inputs for special coinage applications. NOR gate 1H combines these separate inputs, making signal 5COINT, which sets the interrupt flip-flop (6E on page 8) when either coin input becomes active, thus forcing the microprocessor to jump the interrupt service routine. This interrupt driven operation prevents ever missing a coin when inserted. However, this also means that when a game is first powered up, the coin input must be inactive. If for some reason the coin input switch is enabled at the time of power up, the game does not properly initialize until the switch is disabled.

### 6. Hardware Generated Line Positioning Proms (3E, 4E)


These PROMs are not used for SPECTAR. Generally their function is to create solid or dotted lines on the screen.

### 7. Blanking and Video Clocking (5H)

Flip-flop 5H merely combines blanking and all other video.

### 8. Black and White Composite Video Output (1H)

This circuit is not used for SPECTAR. If desired, however, these components may be installed to aid troubleshooting, by acting as a "video probe".

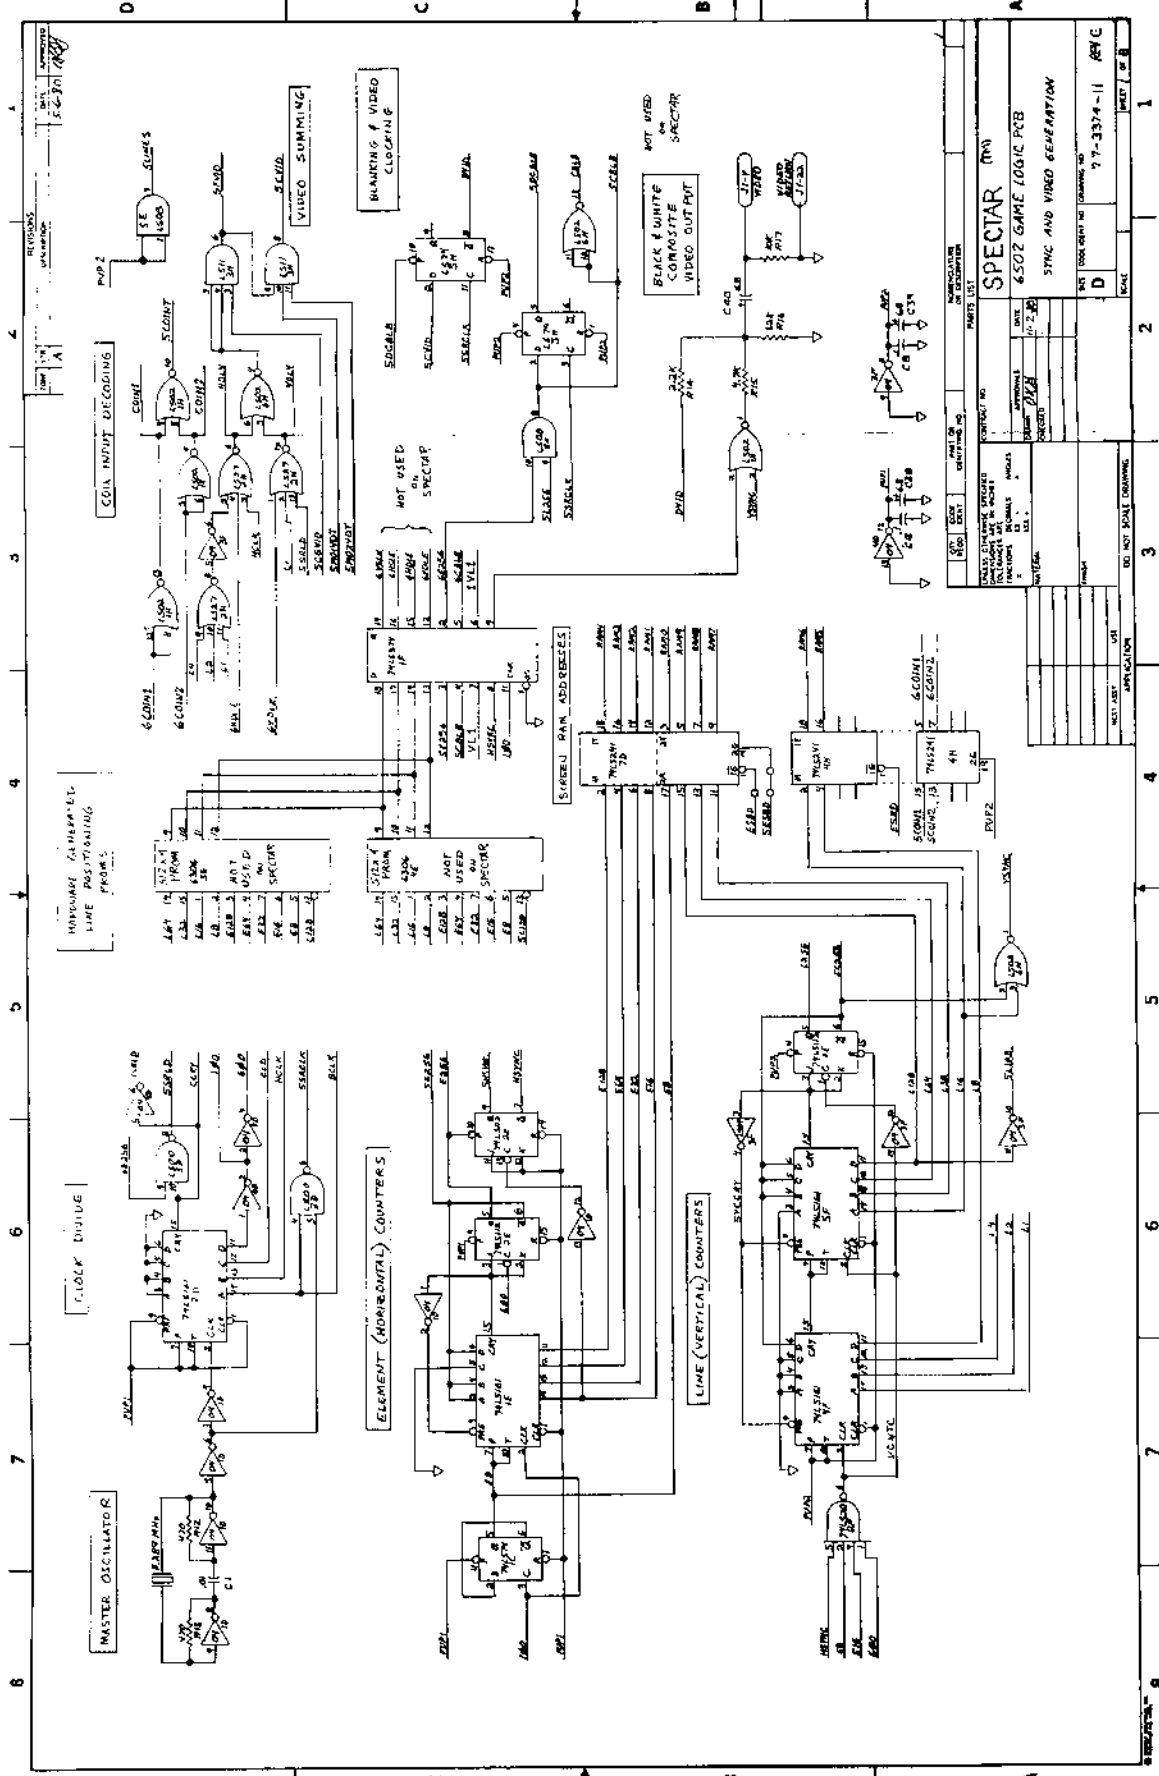

SPECTRA	
6502 GAME LOGIC PCB	
SYNC AND VIDEO GENERATION	
DATE	11-2-80
DESIGNER	DLB
CHECKED	
APPROVED	
CONTRACT NO.	
PROJECT	
REV	DESCRIPTION
1	ISSUE
2	
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	
14	
15	
16	
17	
18	
19	
20	
21	
22	
23	
24	
25	
26	
27	
28	
29	
30	
31	
32	
33	
34	
35	
36	
37	
38	
39	
40	
41	
42	
43	
44	
45	
46	
47	
48	
49	
50	
51	
52	
53	
54	
55	
56	
57	
58	
59	
60	
61	
62	
63	
64	
65	
66	
67	
68	
69	
70	
71	
72	
73	
74	
75	
76	
77	
78	
79	
80	
81	
82	
83	
84	
85	
86	
87	
88	
89	
90	
91	
92	
93	
94	
95	
96	
97	
98	
99	
100	

REV	DESCRIPTION
1	ISSUE
2	
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	
14	
15	
16	
17	
18	
19	
20	
21	
22	
23	
24	
25	
26	
27	
28	
29	
30	
31	
32	
33	
34	
35	
36	
37	
38	
39	
40	
41	
42	
43	
44	
45	
46	
47	
48	
49	
50	
51	
52	
53	
54	
55	
56	
57	
58	
59	
60	
61	
62	
63	
64	
65	
66	
67	
68	
69	
70	
71	
72	
73	
74	
75	
76	
77	
78	
79	
80	
81	
82	
83	
84	
85	
86	
87	
88	
89	
90	
91	
92	
93	
94	
95	
96	
97	
98	
99	
100	

RECORDS SECTION 5-2-80

DATE 11-2-80

DESIGNER DLB

CONTRACT NO.

PROJECT

REV 1 ISSUE

REV 2

REV 3

REV 4

REV 5

REV 6

REV 7

REV 8

REV 9

REV 10

REV 11

REV 12

REV 13

REV 14

REV 15

REV 16

REV 17

REV 18

REV 19

REV 20

REV 21

REV 22

REV 23

REV 24

REV 25

REV 26

REV 27

REV 28

REV 29

REV 30

REV 31

REV 32

REV 33

REV 34

REV 35

REV 36

REV 37

REV 38

REV 39

REV 40

REV 41

REV 42

REV 43

REV 44

REV 45

REV 46

REV 47

REV 48

REV 49

REV 50

REV 51

REV 52

REV 53

REV 54

REV 55

REV 56

REV 57

REV 58

REV 59

REV 60

REV 61

REV 62

REV 63

REV 64

REV 65

REV 66

REV 67

REV 68

REV 69

REV 70

REV 71

REV 72

REV 73

REV 74

REV 75

REV 76

REV 77

REV 78

REV 79

REV 80

REV 81

REV 82

REV 83

REV 84

REV 85

REV 86

REV 87

REV 88

REV 89

REV 90

REV 91

REV 92

REV 93

REV 94

REV 95

REV 96

REV 97

REV 98

REV 99

REV 100

SCALE 1

DO NOT SCALE DRAWING

NOT AVOID

APPLICATION

97-3374-11 REV C

1

2

3

4

5

6

7

8

## GAME LOGIC PCB

### 1. Screen Controller PROM (6D)

This PROM controls the direction of data flow into and out of the screen RAM and character generator RAM. It prevents timing errors and buss conflicts, assuring that the microprocessor can write to either the screen or character generator RAM, or read back from either.

### 2. Screen RAM (7B, 8B)

The screen RAM is comprised of two 1024 x 4 static RAMs, configured to act as a single 1024 x 8 RAM. This creates a screen matrix of 32 horizontal by 32 vertical positions. A single byte code is stored in each of these positions to represent a particular character. During "real time" (the time the CRT is being swept by the electron beam) these character codes address the character generator RAM. Note that the PCB could substitute PROM for character generator RAM, but is not so configured for SPECTAR.

These character codes, when used as addresses, are combined with the three least significant line counts (L1, L2, L4) to present to the character generator output shift register all the necessary data to form an 8 element wide by 8 line high character on the CRT, located within one of the 1024 positions mentioned immediately above, that is, the 32 horizontal by 32 vertical positions.

The screen, then, is a storage place for single byte codes that call up an 8 x 8 character and place it into the corresponding character cell. This character is stored in the character generator RAM, shown on page 3 of the schematic.

### 3. Character Image Storage

Shown on this page are two PROMs (9C, 10C). They could be used as a permanent set of characters. However, SPECTAR uses RAM instead, to increase the flexibility in character manipulation. This portion of RAM appears on page 3 of the Logic schematics.

### 4. PROM Power and Signal Selection (10B)


This Dip Shunt configures the logic for different types of PROM devices. For SPECTAR, however, this Dip Shunt is unnecessary due to the fact that RAM has been used rather than PROM.

### 5. Character Generator Output Shift Register (12B)

Video from the character generator memory devices (RAM in the case of SPECTAR) is formed by this shift register as a byte of data that displays one line at a time from left to right on the CRT. This ultimately forms an 8 line high by 8 element wide character positioned on the screen according to the time it is presented to the shift register.

Output from this shift register is all the images seen on the screen except the player image and the player missile image.



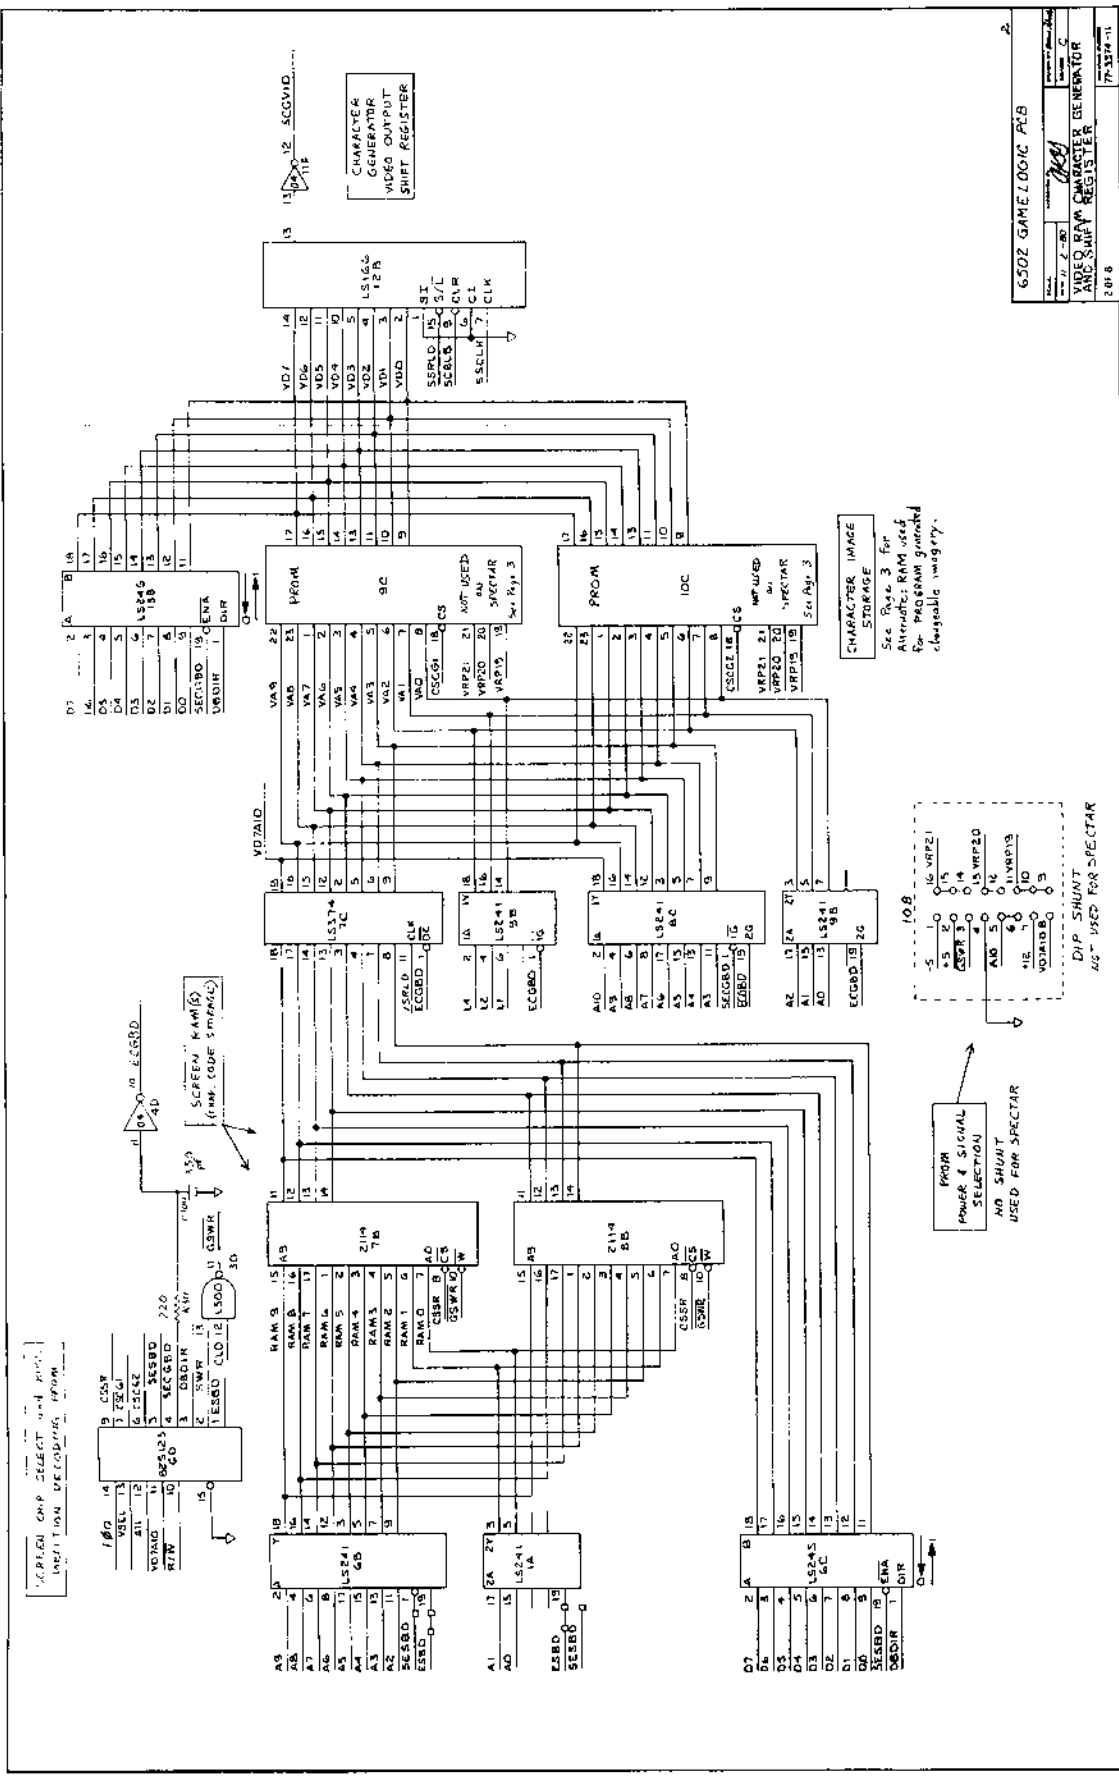

6502 GAMELOGIC PCB  
 VIDEO RAM CHARACTER GENERATOR AND SHIFT REGISTER  
 2018  
 77-3214-11

CHARACTER IMAGE STORAGE  
 See Page 3 for  
 Address: RAM used  
 for PROGRAM generated  
 changeable imagery.

FROM POWER & SIGNAL SELECTION  
 NO SHUNT USED FOR SPECTAR  
 DIP SHUNT NOT USED FOR SPECTAR

SCREEN RAM SELECT 0-4 FROM  
 INITIATION DECODING FROM

100  
 14  
 13  
 12  
 11  
 10  
 9  
 8  
 7  
 6  
 5  
 4  
 3  
 2  
 1  
 0

RAM 9  
 RAM 8  
 RAM 7  
 RAM 6  
 RAM 5  
 RAM 4  
 RAM 3  
 RAM 2  
 RAM 1  
 CSWR  
 CSRD  
 CSWR  
 CSRD

A1  
 A0  
 CSWR  
 CSRD

A1  
 A0  
 CSWR  
 CSRD

D0  
 D1  
 D2  
 D3  
 D4  
 D5  
 D6  
 D7  
 CSWR  
 CSRD

108  
 CSWR  
 CSRD  
 CSWR  
 CSRD  
 CSWR  
 CSRD  
 CSWR  
 CSRD

108  
 CSWR  
 CSRD  
 CSWR  
 CSRD  
 CSWR  
 CSRD  
 CSWR  
 CSRD

## **GAME LOGIC PCB Image Storage RAM**

### **1. Character Generator Image Storage RAM (13C, 11C, 14C, 12C)**

These four RAMs, when used in this configuration, act as a 2048 x 8 bit RAM. The images placed on the screen are stored in this RAM by the microprocessor, according to the game program. In this RAM images are established, altered, shifted slightly, and even replaced with a new set, if required by the program.

When called by the logic to do so, the RAM presents, to the character generator shift register, a single byte, representing one line of a particular image. Each image is composed of 8 lines of data, each line is one byte-wide. Thus, 256 images of 8 x 8 bits can be stored here simultaneously and "called up" by the screen RAM to be displayed on the CRT in any of the 1024 character cell positions. A single byte code, stored in the screen RAM, calls up a character. The character may change or move by replacing the single byte code in the screen RAM, or by altering the data in the character generator RAM which forms the image.

DATA IN CALCULATOR  
IMAGE STORAGE VIEWS

For use with program  
generated upgrade notes.

FILE NO. 578-145

VA3	15	UD7
VA4	16	VD8
VA5	17	VD9
VA6	1	VD4
VA7	2	RAM
VA8	3	214
VA9	4	14C
VA10	5	
VA11	6	
VA12	7	
VA13	8	
VA14	9	
VA15	10	
VA16	11	
VA17	12	
VA18	13	
VA19	14	
VA20	15	
VA21	16	
VA22	17	
VA23	18	
VA24	19	
VA25	20	
VA26	21	
VA27	22	
VA28	23	
VA29	24	
VA30	25	
VA31	26	
VA32	27	
VA33	28	
VA34	29	
VA35	30	
VA36	31	
VA37	32	
VA38	33	
VA39	34	
VA40	35	
VA41	36	
VA42	37	
VA43	38	
VA44	39	
VA45	40	
VA46	41	
VA47	42	
VA48	43	
VA49	44	
VA50	45	
VA51	46	
VA52	47	
VA53	48	
VA54	49	
VA55	50	
VA56	51	
VA57	52	
VA58	53	
VA59	54	
VA60	55	
VA61	56	
VA62	57	
VA63	58	
VA64	59	
VA65	60	
VA66	61	
VA67	62	
VA68	63	
VA69	64	
VA70	65	
VA71	66	
VA72	67	
VA73	68	
VA74	69	
VA75	70	
VA76	71	
VA77	72	
VA78	73	
VA79	74	
VA80	75	
VA81	76	
VA82	77	
VA83	78	
VA84	79	
VA85	80	
VA86	81	
VA87	82	
VA88	83	
VA89	84	
VA90	85	
VA91	86	
VA92	87	
VA93	88	
VA94	89	
VA95	90	
VA96	91	
VA97	92	
VA98	93	
VA99	94	
VA100	95	
VA101	96	
VA102	97	
VA103	98	
VA104	99	
VA105	100	
VA106	101	
VA107	102	
VA108	103	
VA109	104	
VA110	105	
VA111	106	
VA112	107	
VA113	108	
VA114	109	
VA115	110	
VA116	111	
VA117	112	
VA118	113	
VA119	114	
VA120	115	
VA121	116	
VA122	117	
VA123	118	
VA124	119	
VA125	120	
VA126	121	
VA127	122	
VA128	123	
VA129	124	
VA130	125	
VA131	126	
VA132	127	
VA133	128	
VA134	129	
VA135	130	
VA136	131	
VA137	132	
VA138	133	
VA139	134	
VA140	135	
VA141	136	
VA142	137	
VA143	138	
VA144	139	
VA145	140	
VA146	141	
VA147	142	
VA148	143	
VA149	144	
VA150	145	
VA151	146	
VA152	147	
VA153	148	
VA154	149	
VA155	150	
VA156	151	
VA157	152	
VA158	153	
VA159	154	
VA160	155	
VA161	156	
VA162	157	
VA163	158	
VA164	159	
VA165	160	
VA166	161	
VA167	162	
VA168	163	
VA169	164	
VA170	165	
VA171	166	
VA172	167	
VA173	168	
VA174	169	
VA175	170	
VA176	171	
VA177	172	
VA178	173	
VA179	174	
VA180	175	
VA181	176	
VA182	177	
VA183	178	
VA184	179	
VA185	180	
VA186	181	
VA187	182	
VA188	183	
VA189	184	
VA190	185	
VA191	186	
VA192	187	
VA193	188	
VA194	189	
VA195	190	
VA196	191	
VA197	192	
VA198	193	
VA199	194	
VA200	195	
VA201	196	
VA202	197	
VA203	198	
VA204	199	
VA205	200	
VA206	201	
VA207	202	
VA208	203	
VA209	204	
VA210	205	
VA211	206	
VA212	207	
VA213	208	
VA214	209	
VA215	210	
VA216	211	
VA217	212	
VA218	213	
VA219	214	
VA220	215	
VA221	216	
VA222	217	
VA223	218	
VA224	219	
VA225	220	
VA226	221	
VA227	222	
VA228	223	
VA229	224	
VA230	225	
VA231	226	
VA232	227	
VA233	228	
VA234	229	
VA235	230	
VA236	231	
VA237	232	
VA238	233	
VA239	234	
VA240	235	
VA241	236	
VA242	237	
VA243	238	
VA244	239	
VA245	240	
VA246	241	
VA247	242	
VA248	243	
VA249	244	
VA250	245	
VA251	246	
VA252	247	
VA253	248	
VA254	249	
VA255	250	
VA256	251	
VA257	252	
VA258	253	
VA259	254	
VA260	255	
VA261	256	
VA262	257	
VA263	258	
VA264	259	
VA265	260	
VA266	261	
VA267	262	
VA268	263	
VA269	264	
VA270	265	
VA271	266	
VA272	267	
VA273	268	
VA274	269	
VA275	270	
VA276	271	
VA277	272	
VA278	273	
VA279	274	
VA280	275	
VA281	276	
VA282	277	
VA283	278	
VA284	279	
VA285	280	
VA286	281	
VA287	282	
VA288	283	
VA289	284	
VA290	285	
VA291	286	
VA292	287	
VA293	288	
VA294	289	
VA295	290	
VA296	291	
VA297	292	
VA298	293	
VA299	294	
VA300	295	
VA301	296	
VA302	297	
VA303	298	
VA304	299	
VA305	300	
VA306	301	
VA307	302	
VA308	303	
VA309	304	
VA310	305	
VA311	306	
VA312	307	
VA313	308	
VA314	309	
VA315	310	
VA316	311	
VA317	312	
VA318	313	
VA319	314	
VA320	315	
VA321	316	
VA322	317	
VA323	318	
VA324	319	
VA325	320	
VA326	321	
VA327	322	
VA328	323	
VA329	324	
VA330	325	
VA331	326	
VA332	327	
VA333	328	
VA334	329	
VA335	330	
VA336	331	
VA337	332	
VA338	333	
VA339	334	
VA340	335	
VA341	336	
VA342	337	
VA343	338	
VA344	339	
VA345	340	
VA346	341	
VA347	342	
VA348	343	
VA349	344	
VA350	345	
VA351	346	
VA352	347	
VA353	348	
VA354	349	
VA355	350	
VA356	351	
VA357	352	
VA358	353	
VA359	354	
VA360	355	
VA361	356	
VA362	357	
VA363	358	
VA364	359	
VA365	360	
VA366	361	
VA367	362	
VA368	363	
VA369	364	
VA370	365	
VA371	366	
VA372	367	
VA373	368	
VA374	369	
VA375	370	
VA376	371	
VA377	372	
VA378	373	
VA379	374	
VA380	375	
VA381	376	
VA382	377	
VA383	378	
VA384	379	
VA385	380	
VA386	381	
VA387	382	
VA388	383	
VA389	384	
VA390	385	
VA391	386	
VA392	387	
VA393	388	
VA394	389	
VA395	390	
VA396	391	
VA397	392	
VA398	393	
VA399	394	
VA400	395	
VA401	396	
VA402	397	
VA403	398	
VA404	399	
VA405	400	
VA406	401	
VA407	402	
VA408	403	
VA409	404	
VA410	405	
VA411	406	
VA412	407	
VA413	408	
VA414	409	
VA415	410	
VA416	411	
VA417	412	
VA418	413	
VA419	414	
VA420	415	
VA421	416	
VA422	417	
VA423	418	
VA424	419	
VA425	420	
VA426	421	
VA427	422	
VA428	423	
VA429	424	
VA430	425	
VA431	426	
VA432	427	
VA433	428	
VA434	429	
VA435	430	
VA436	431	
VA437	432	
VA438	433	
VA439	434	
VA440	435	
VA441	436	
VA442	437	
VA443	438	
VA444	439	
VA445	440	
VA446	441	
VA447	442	
VA448	443	
VA449	444	
VA450	445	
VA451	446	
VA452	447	
VA453	448	
VA454	449	
VA455	450	
VA456	451	
VA457	452	
VA458	453	
VA459	454	
VA460	455	
VA461	456	
VA462	457	
VA463	458	
VA464	459	
VA465	460	
VA466	461	
VA467	462	
VA468	463	
VA469	464	
VA470	465	
VA471	466	
VA472	467	
VA473	468	
VA474	469	
VA475	470	
VA476	471	
VA477	472	
VA478	473	
VA479	474	

## GAME LOGIC PCB

### 1. The 6502 Microprocessor (2A)

For detailed information concerning this microprocessor, refer to the MOSTEK publication, 6500-10A, MCS Microcomputer Family Hardware Manual.

One feature that should be mentioned here, however, is that this microprocessor has "memory-mapped I/O". This means that all ports interfacing to peripherals of any type must be located within the normal memory map, with no duplication of addresses, since no instructions are specifically oriented toward I/O operations.

### 2. Power-on Reset circuit (connected to 2A pin 40)

When power is first applied to a game, a particular sequence of events must occur to set up all logic conditions. If this sequence is broken for whatever reason, the microprocessor may become confused, and the game will not start and run.

This sequence is accomplished when the reset line to the microprocessor is the last line allowed to reach a "high" logic level. The Power-on reset circuit makes sure this occurs by utilizing the charge time of an RC network as a delay.

If any kind of power interruption occurs during normal game play, the power-on reset circuit insures that the microprocessor is reset. This alleviates thoroughly confusing the microprocessor while it also recreates the original power-on sequence.

### 3. Processor Workspace RAM (4A, 5A)

The RAM, or workspace, consists of the lowest 1024 bytes of memory and can be divided into three separate sections due to distinctly different functions.

The lowest 256 bytes (0 to FF Hexadecimal) is reserved for special software register operations, and is called "zero page". The processor uses this area to store dynamic variables. For details of this type of operation, refer to 6502 technical literature regarding "Zero Page Addressing".


The next higher 256 bytes (100 to 1FF Hex) is reserved for the 6502 stack. The processor stores return addresses in the stack when interrupted or called to execute a subroutine. The game program may also request the processor to store other kinds of information here for later retrieval.

The next higher 512 bytes (200 to 3FF Hex) are used as a scratchpad area. Miscellaneous calculations and their results are temporarily stored here.

### 4. Main Address Decoding (5C, 5D, 5E)

This circuit is the first stage of the address line decoding necessary to organize the memory map; that is, it places specific functions or devices within generalized blocks of the memory map, grouped by function.

For details on the addressing scheme, see MEMORY MAP, Figure 1.

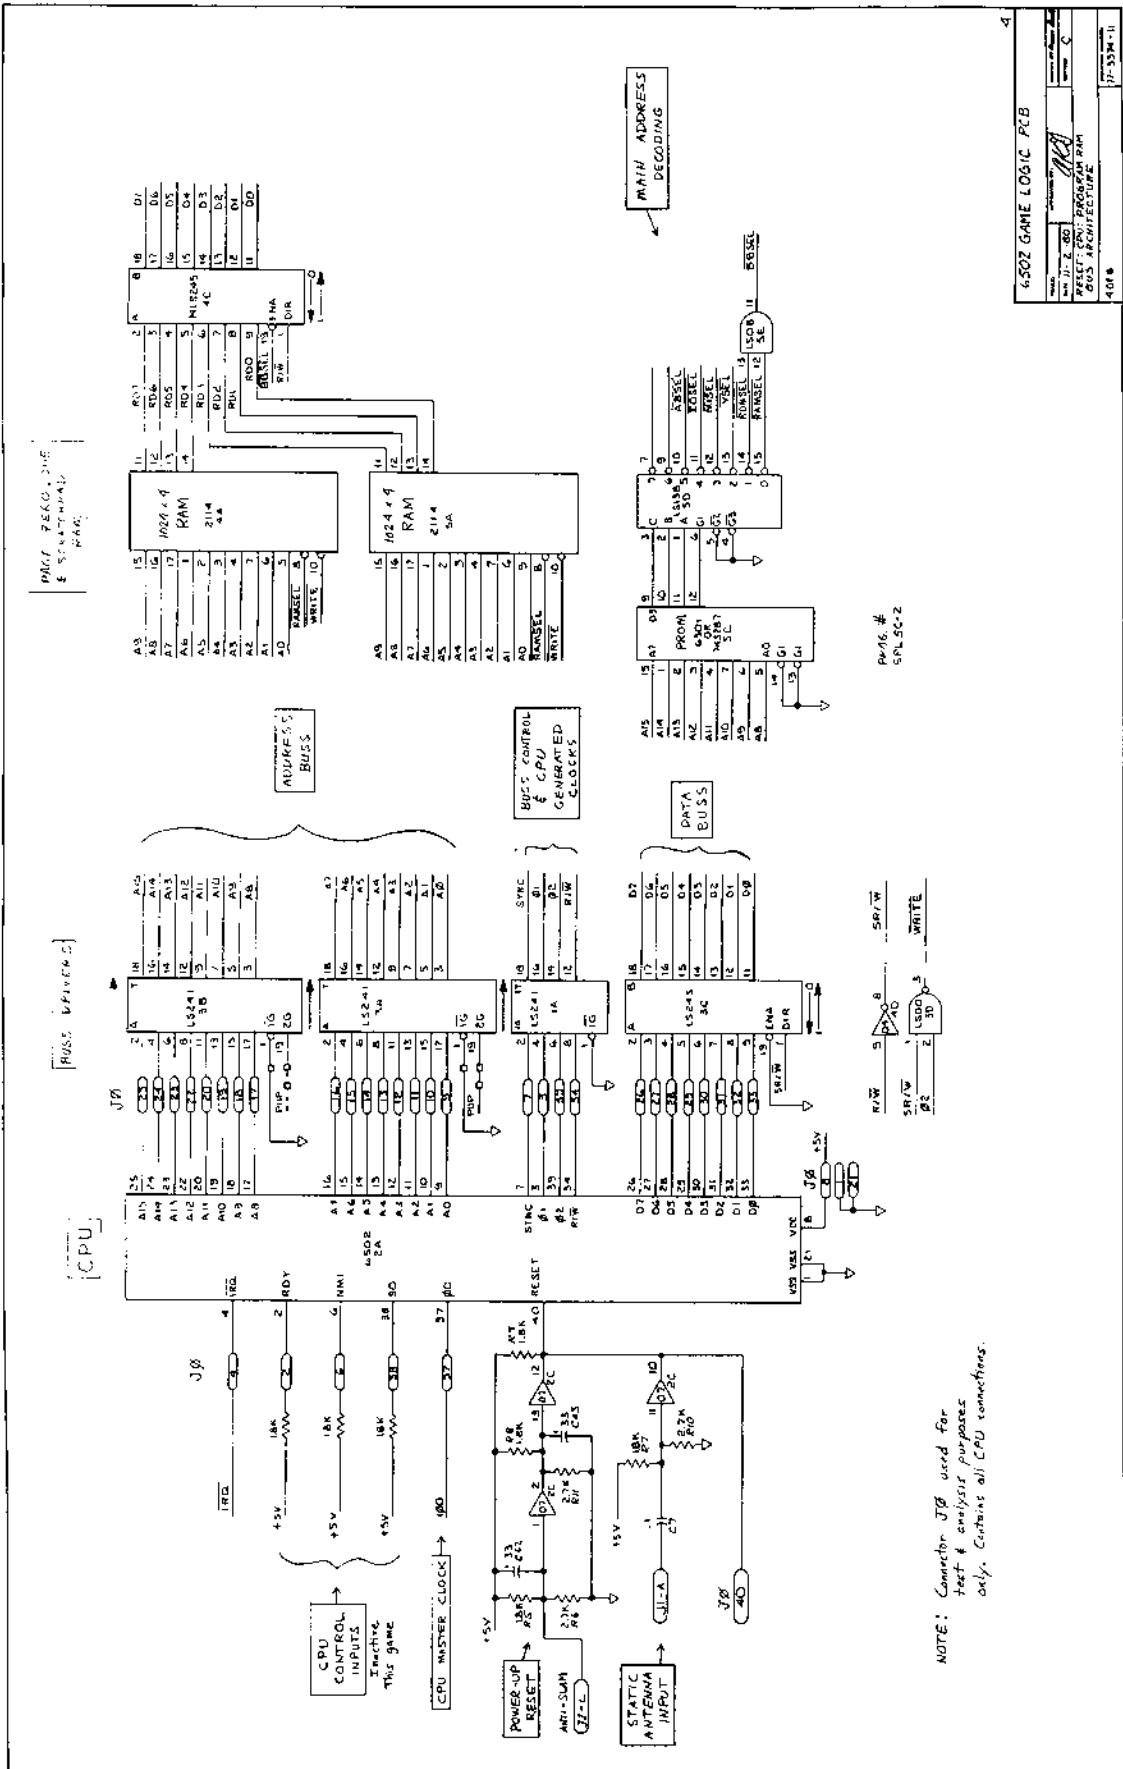

4

## GAME LOGIC PCB

### 1. Program Memory (6A through 13A)

These memory devices are 2716 EPROMS on Spectar. Note that four of the lines to each memory device (PC\$0 through PC\$7, PAP19, PAP20, PAP21) are programmable through jumper configurations located at 4B and 11B. This allows different memory devices to be used and/or it relocates the program memory within the memory map.

#### CAUTION

Some Spectar boards are configured for 2716 EPROMS needing only a single +5v supply, while others are configured for EPROMS requiring +12v, +5v, and -5v. REPLACING EPROMS without due regard to this configuration may destroy all program memory devices. If in doubt, please first contact the Exidy Service Department for assistance.

### 2. PROM Address Selection (4B, 5B)

This is a second stage of address decoding, used to select each individual memory device when addressed. Signal ROMSEL (from page 4 Main Address Decoding) selects the Program Memory devices in general, and jumper 4B, together with decoder 5B further defines an address to a particular memory device.


### 3. Memory Device "Personality" Selection (11B)

The dip shunt, or jumpers block, alters power and signal configuration to the program memory devices. Note that the configuration shown on the schematic requires the use of 2716 EPROMS needing +12v, +5v, and -5v. PLEASE EXERCISE CAUTION regarding any change, in this configuration or replacement of memory devices.



#### MEMORY MAP

Hex Address	Function or Device
FFF7-FFFF	Interrupt and Reset Vectors
5201	Audio Board Tone Data Latch (write)
5200	Audio Board Control Latch (write)
5103	Interrupt Condition Latch (read)
5101	Control Inputs Port (read)
5101	Output Control Latch (write) (Not used in Spectar upright)
5100	Moving Objects Image Latch (write)
5100	Option Dipswitch Port (read)
50C0	Moving Object 2 Vertical Position Latch (write)
5080	Moving Object 2 Horizontal Position Latch (write)
5040	Moving Object 1 Vertical Position Latch (write)
5000	Moving Object 1 Horizontal Position Latch (write)
4800-4FFF	Character Generator RAM
4000-43FF	Screen RAM
0800-3FFF	Program PROM
0200-03FF	Scratchpad RAM
0100-01FF	Stack RAM
0000-00FF	Zero Page RAM


NON-VOLATILE MEMORY

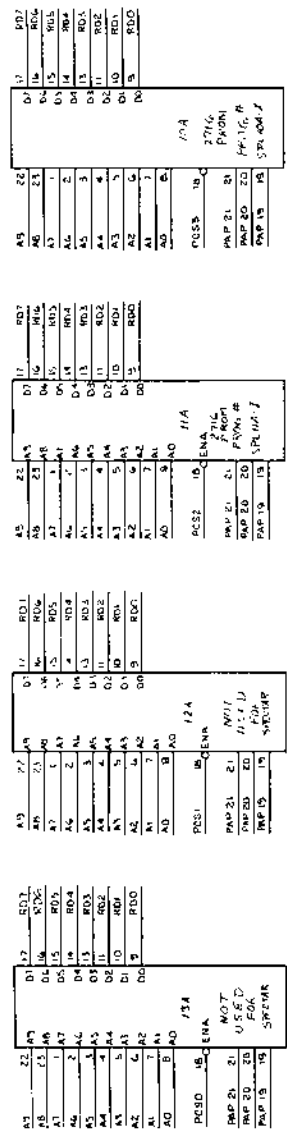

DATA BUS  
TERMINATION  
Resistor Suppression

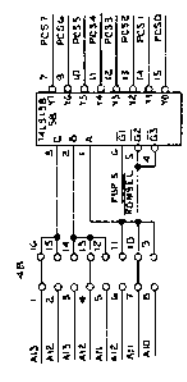

PROM ADDRESS SELECTION  
Configuration as shown  
For SPECYAK

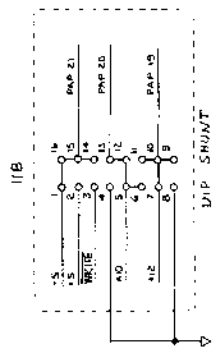

MEMORY DEVICE PERSONALITY SELECTION  
Configuration shown  
For 3 voltage  
2716 EPROM

EXIDY INC.  
DATE: 11-2-80  
DESIGNED BY: JES  
CHECKED BY: JES  
PART NO.: 6502 GAME LOGIC PCB  
SIPB

## GAME LOGIC PCB

### 1. Moving Object Horizontal Position (13F, 15F, 14F, 16F)

Counters 13F and 15F form a 2 byte-wide counter which horizontally positions Moving Object 1 on the screen. These counters are preloaded to a certain value by the microprocessor during Vertical Retrace time. Then, after each occurrence of the Horizontal Sync, they begin to count. The count outputs AND'ed through 15E give rise to signal M1HW, the Horizontal Position Window for Moving Object 1. Counters 14F and 16F are the equivalent circuit for Moving Object 2.

### 2. Moving Object Vertical Position Counters (16E, 12E, 1E, 13E)

Counters 16E and 12E form a 2 byte-wide counter which positions Moving Object 1 vertically on the screen. These counters are preloaded to a certain value by the microprocessor during Vertical Retrace time. Then, after each occurrence of Vertical sync, they begin counting. The four count outputs of the least significant of these two counters (M1L1, M1L2, M1L3, M1L4) are sent to the moving object image PROM to specify which line of the image is presently being displayed. The AND'ed outputs of the second counter give rise to signal M1VW, the Vertical Position Window for Moving Object 1. Counters 11E and 13E are the equivalent circuit for Moving Object 2.

### 3. "Write Moving Object" Decoding (6F, 16H, 5E, 3F)


Consists of two distinctly different functions. 6F and 16H form the circuit that generates the load pulses for the moving object position counters, while 5E and 3F simply prevent the counters from counting during blanking.

### 4. Color Interface Output (16B)

This is a 14 pin DIP socket used as the connector interface to the color adapter board. The signals and their functions are:

Pin #	
1	SSRLOAD = Shift Register Load Pulse (Neg. True)
2	CBLB = Composite Blanking
3	CSYNC = Composite Sync
4	5CVID = Composite Video (Neg. True)
5	5SCLK = Shift Register Clock (Neg. True)
6	HSYNC = Horizontal Sync
7	GND
8	VSYNC = Vertical Sync
9	5MO2VID = Moving Object 2 Video (Neg. True)
10	5MO1VID = Moving Object 1 Video (Neg. True)
11	VD7A09 = Character Generator Address Line 9
12	5LINES = NOT USED ON SPECTAR
13	VD7A10 = Character Generator Address Line 10 +5V



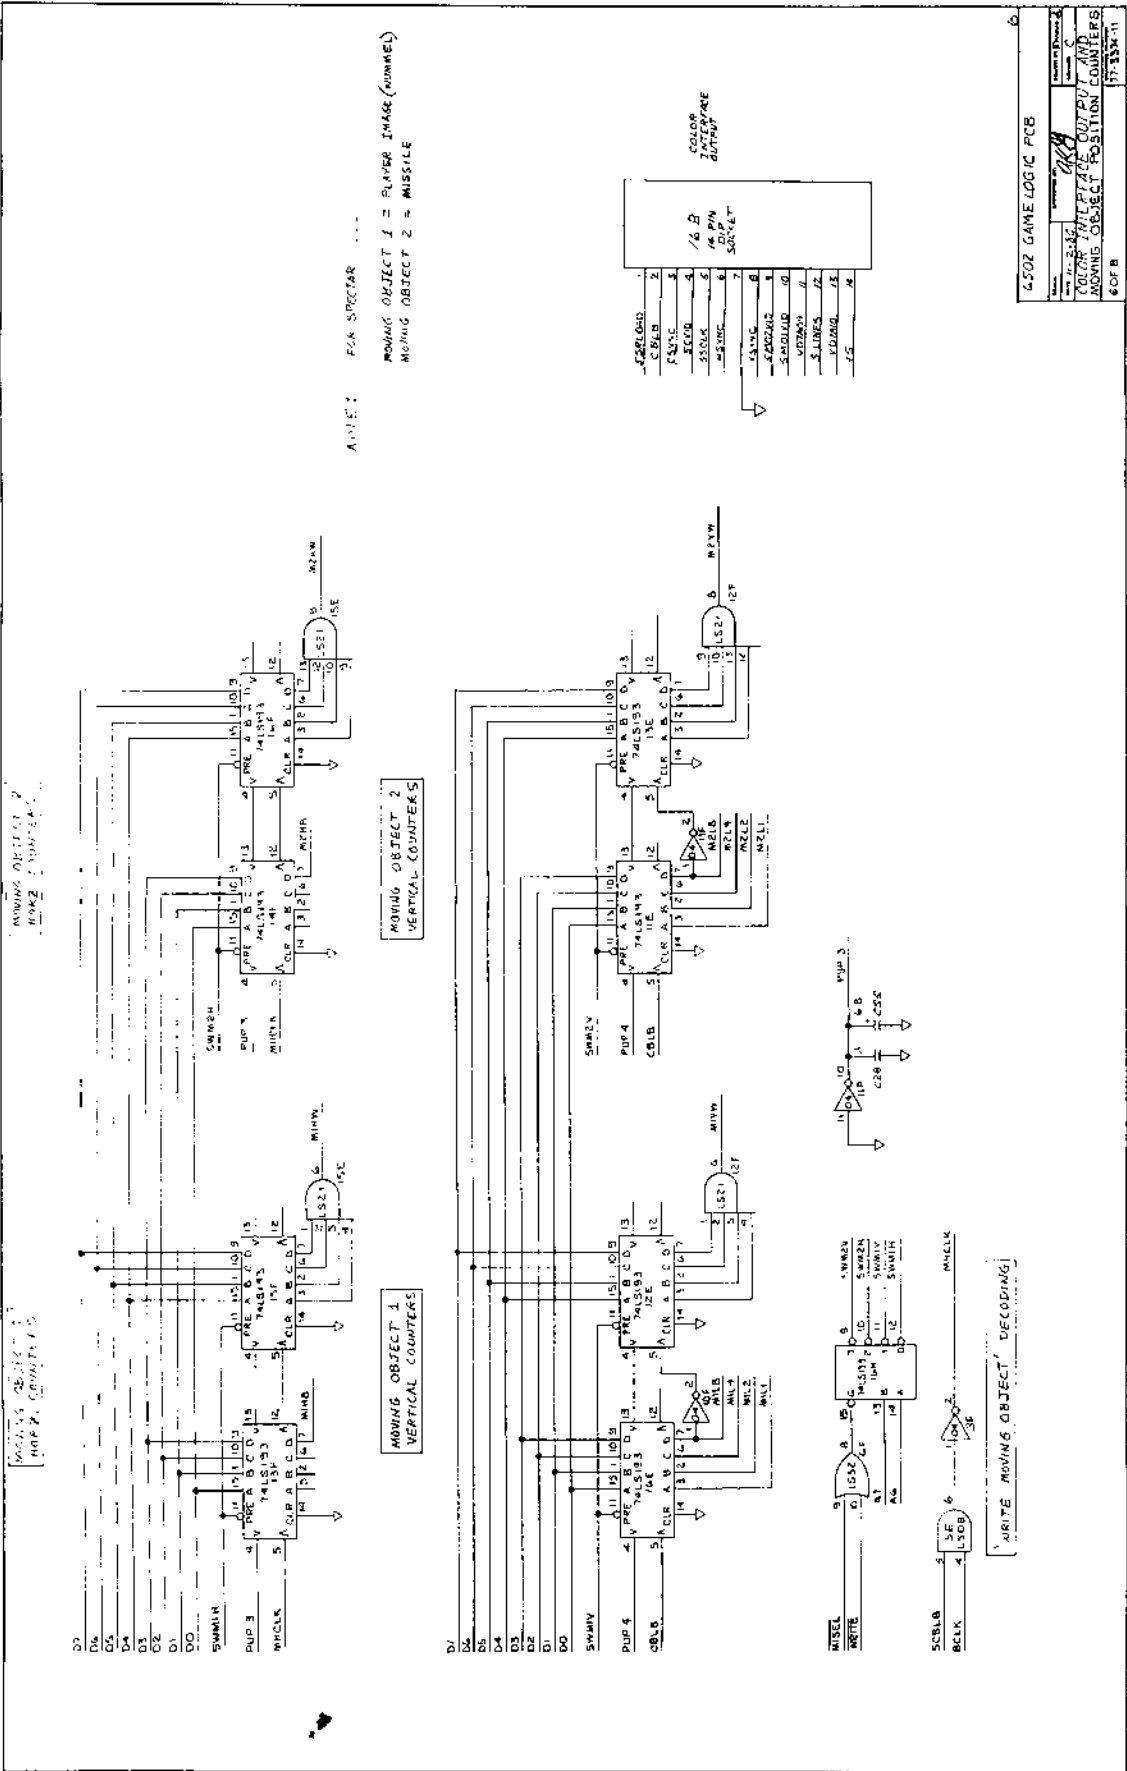

6502 GAME LOGIC PCB  
 COLOR PALETTE OUTPUT AND MOVING OBJECT POSITION COUNTERS  
 # OF B 17-334-11

MOVING OBJECT 1 = PLAYER IMAGE (RUMMEL)  
 MOVING OBJECT 2 = MISSILE

FOR SPECTAR

COLOR PALETTE OUTPUT AND MOVING OBJECT POSITION COUNTERS

WRITE MOVING OBJECT DECODING

## GAME LOGIC PCB

### 1. Moving Object Multiplexing (14A, 14E)

These two multiplexers pass information to the moving objects image PROM. They contain two codes: one determines which image should appear, and the other specifies which line of that image is to be displayed.

The data passed alternates between data for Moving Object 1 (player image) and Moving Object 2 (player missile), depending on the state of element count E32.

The upper multiplexer (14A) passes the "which image" code, and the lower multiplexer (14E) passes the "which line of that image" code.

### 2. Moving Objects Image PROM (11D)

This PROM accepts as data the image and line codes of moving objects 1 and 2 (see "Moving Object Multiplexing" above). It then presents the appropriate data for one line of the image to the output shift registers.

The timing of the logic insures that the correct pair of shift registers are loaded with the data, then shifted out at the correct time to become, one line at a time, the 16 lines of video for that character (Moving Object 1 or 2).

### 3. Moving Object Video Output Shift Registers (12D, 13D, 14D, 15D)

Shift registers 12D and 13D together form a 16 bit shift register whose task is to accept, as data, 16 bits (2 bytes) representing a single line of the image for Moving Object 1, then shift these 16 parallel bits out serially to become video. This operation is repeated for 16 consecutive lines, resulting in a video image that is 16 bits wide by 16 lines high on the monitor screen.

Shift registers 14D and 15D together form this same type of circuit, identical in function, for Moving Object 2.

### 4. Moving Objects Shift Register Load Logic (2F, 16H)

This circuit sends properly timed load signals to the Moving Object Video Shift Registers. These load signals are needed to load the image data into the shift registers at location 12D or 14D.

### 5. Moving Object Shift Register Control Logic (15H, 14H)

The input signals to the upper two gates (15H) represent horizontal and vertical position "windows" for the two moving objects (for example, M1HW Moving Object 1 Horizontal Window, M2VW Moving Object 2 Vertical Window). These windows allow the Moving Object shift registers to shift only at the right time. This insures the image is generated at the correct position on the screen.

The lower 2 gates of 15H are, in Spectar, used only for later decoding on the color adapter board.

### 6. Memory Device Personality Configuration (10D)

This is another Dip Shunt which reconfigures the PC board in order to use a PROM (11D) of another type or manufacturer.

#### CAUTION

If PROM 11D must be replaced, replace it with the same type if possible. Replacement with a different type PROM without proper reconfiguration of the dip shunt at 10D may cause destruction of the PROM. IF IN DOUBT, CONTACT THE EXIDY SERVICE DEPARTMENT FOR ASSISTANCE.



## GAME LOGIC PCB

### 1. Interrupt Status Latch (8E)

This latch is set when a coin is dropped or vertical sync occurs. When the latch is set, the CPU is interrupted, that is, signal IRQ goes low. This forces the CPU to jump to the interrupt service routine. The interrupt service routine instructs the CPU to check for a coin input, and then run a debounce routine on the coin bits of ports 9E or 15A, depending on which coin input bit was set at 8E.

If the CPU finds no coin input bit set at latch 8E, it will assume the Interrupt condition was caused by vertical sync. This tells the CPU that it should now jump to the routine that services the normal game play, and that the screen can now be updated with new data. The screen can only be updated during the vertical retrace interval.

Note that this latch also has two signals labeled LNG0 and LNG1 which both show PC etched jumpers. These two bits are the select bits for one of four languages, English, French, German, and Spanish. You may select a language by cutting the appropriate jumper, allowing it to be pulled to a logic high. For English, no cutting is necessary. See the Operator's Manual for proper configuration of other languages.

Also on this latch is the signal named TABLE. This signal, tied to a pullup resistor and switch, determines whether the program operates as a table model or in the upright game configuration. See the Operator's Manual for more details.

### 2. Option Switch Port (15A)

This port provides input from the option dipswitch, at location 16A. Data from the dipswitch is gated onto the data buss and read by the CPU at game start. This allows such options as number of turns, coins per game, additional game versus extra turn, etc.

Note that one input of this port (labeled COIN 2) does not come from the switch. Instead, it comes from Coin Input 2, and is used for debouncing the auxiliary coin input switch.

### 3. Control Inputs Port (9E)

This port provides input from the controls located on the control panel, such as the joystick, fire button, one player start, and two player start. Data from these controls are gated onto the data buss for examination by the CPU during the regular service routine (which is synchronized to the vertical interval).

Note that one of these inputs is from the COIN1 input (labeled 5COIN1) rather than a game control input. The COIN1 input to this port is used for debouncing the standard coin input.

### 4. Moving Image Latch

Only the CPU can write to the moving image latch. This latch contains the code that specifies which image or images are presently being displayed by the hardware moving object circuitry.

### 5. Audio Board Port


This latch is written to only by the CPU and transmits instructions to the audio board when any sounds are enabled, disabled, or the game is initialized. For the functions of these instructions, see the audio board schematic and/or description of operation.

### 6. Control Port Latch (9D)

This latch, used only in the Spectar cocktail table versions, is written to only by the CPU and keeps track of which player is "up", in order to select which controls are active, that is, player one or player two.

### 7. I/O Decoding (7E)

The upper half of this decoder generates the chip selects for those devices written to by the CPU, and the lower half generates the chip selects for those devices which are read by the CPU. See the detailed memory map for more precise information.

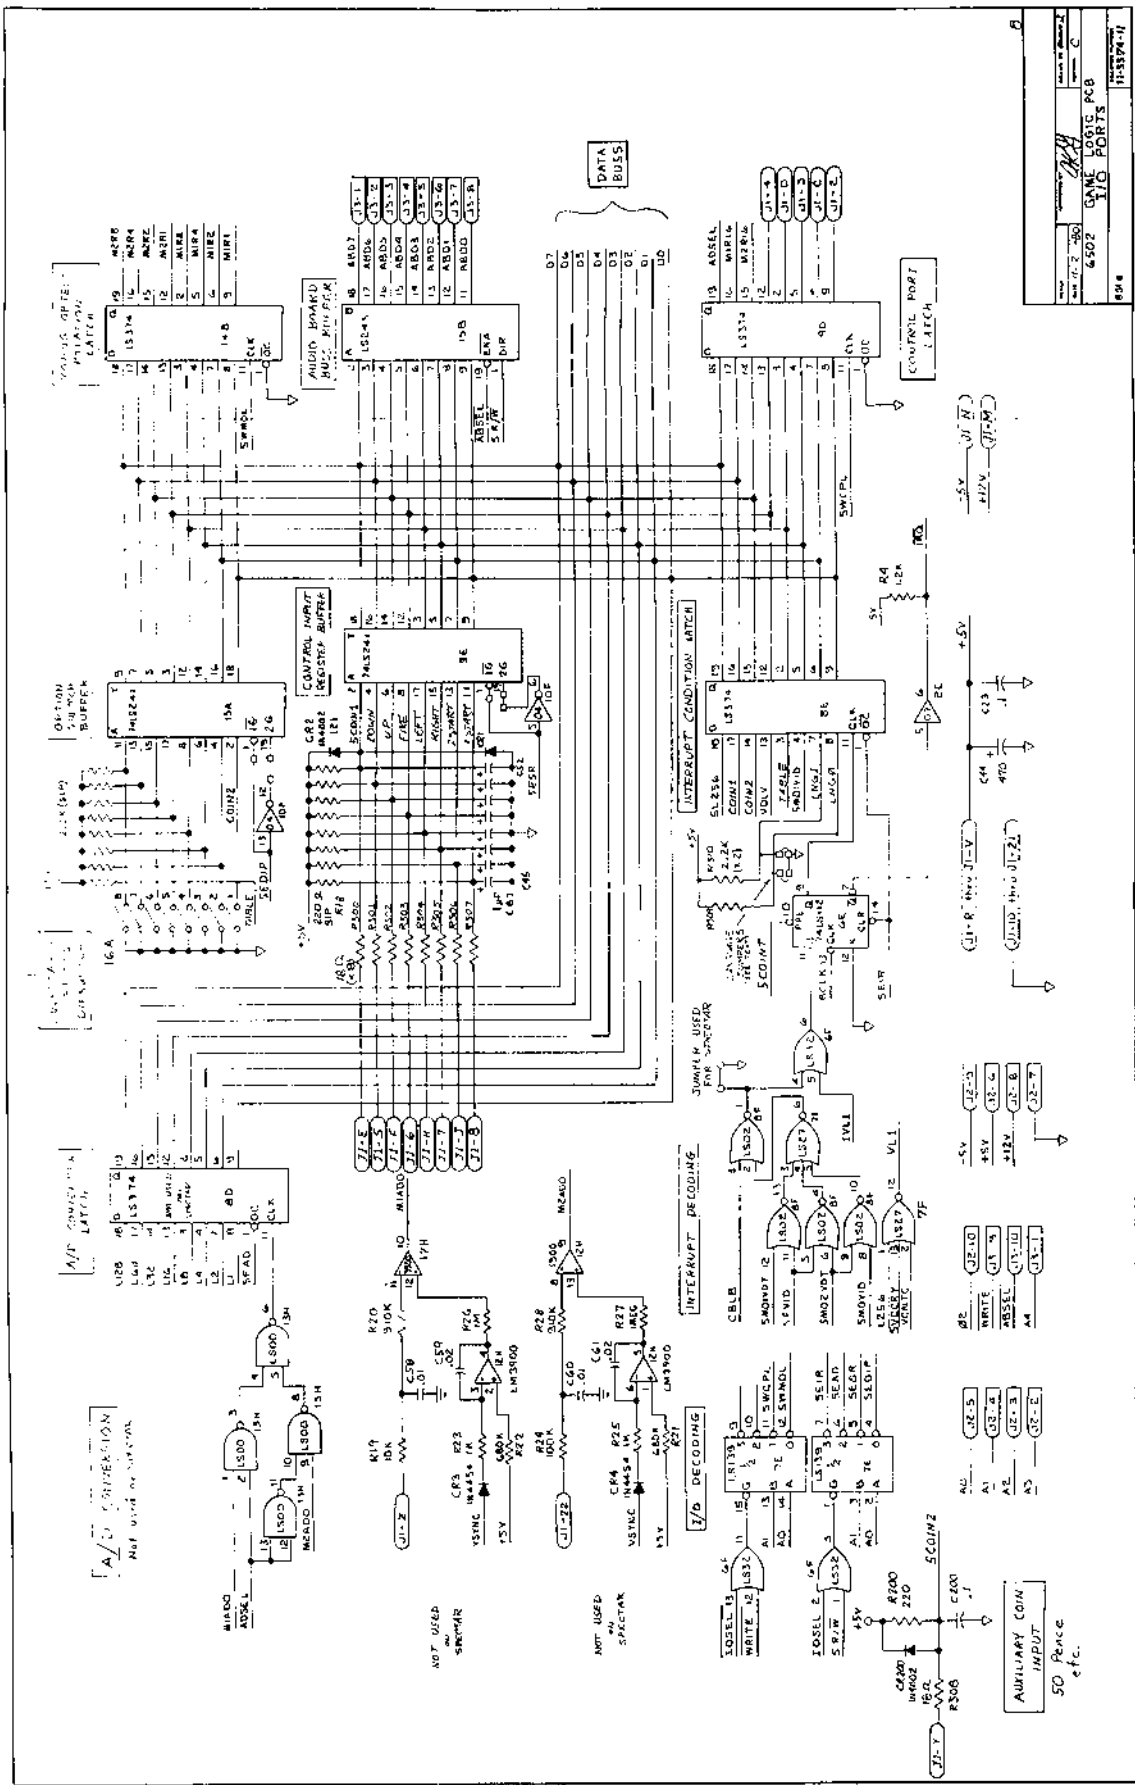

REV	DATE	BY	CHKD BY
1	11/13/80	MM	MM
6502 GAME LOGIC PCB			
TIO PORTS			
89#			

OPTION BUFFER  
 16A 148244  
 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16

AUDIO BOARD  
 19B 15374  
 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20

INTERLUPT DECODING  
 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20

INTERLUPT CONDITION MONITOR  
 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20

CONTROL PORT  
 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20

DATA BUS  
 07 08 09 10 11 12 13 14 15 16 17 18 19 20

A/D CONVERSION  
 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20

OPTION BUFFER  
 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16

INTERLUPT DECODING  
 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20

INTERLUPT CONDITION MONITOR  
 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20

CONTROL PORT  
 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20

NOT USED  
 SPECTAR

NOT USED  
 SPECTAR

AUXILIARY COIN INPUT  
 50 Pence  
 etc.

## AUDIO BOARD

### 1. Address Decoding (1D)

Uses the audio board select signal ABSEL, the 02 AND'ed write signal WRITE, and Address Line A0 to decode the addresses for two input latches. These two latches each receive a byte of data from the CPU instructing the audio board what to do and when. Note that address 5200 Hex and 5201 Hex are the intended address, but since only address line A0 is used, these latches respond to even and odd addresses throughout the 52XX Hex region. For example, the latch at 5201 Hex also responds to 5203 Hex, 5217 Hex, and so on, so long as the least significant digit is odd.

### 2. Control Data Latch (2C)

This latch receives a byte of data from the CPU that sets those particular bits directly used as sound enables. Signal TONE is the enable for the programmable tone (or music) generator. Signal CRASH is the enable for the crash or explosion sound. Signal SHOOT is the enable for the player (Wummel) firing sound. SPECTAR does not use signal CPU MUSIC.

### 3. Tone Data Latch (2D)

This latch receives a byte of data from the CPU that becomes the preload for the most significant counters of the Tone Generation circuit. Varying this preload allows generation of a variety of tones used for music or special effects.

### 4. Tone Generation Circuit (1A, 1B, 3A, 3B, 3D)


Counters 1A and 1B divide the 02 (phase two) processor clock down from approximately 706 Khz to approximately 34 Khz. This frequency establishes a range of tones accurately generated by merely changing the preload of the two most significant counters in this circuit, 3A and 3B.

Flip-flop 3D divides this tone by two again, while transforming a narrow terminal count pulse train into a pulse train having a 50% duty cycle. This means it is at a logic high for the same amount of time it is at a logic low, causing a more pleasing sound to the ear. The output of this circuit is then fed to the input of the summing amplifier.

### 5. White Noise Generation (6D)

Transistor Q4 is the source of this white noise, as its base-emitter junction is broken down by excessive reverse bias. This throws the junction into heavy electron agitation (thermal emission) which activity produces noise across a wide bandwidth.

Operational Amplifier 6D is used merely to boost the output amplitude of this noise, and transistor Q5 serves as an output buffer stage to prevent loading of the operational amplifier.

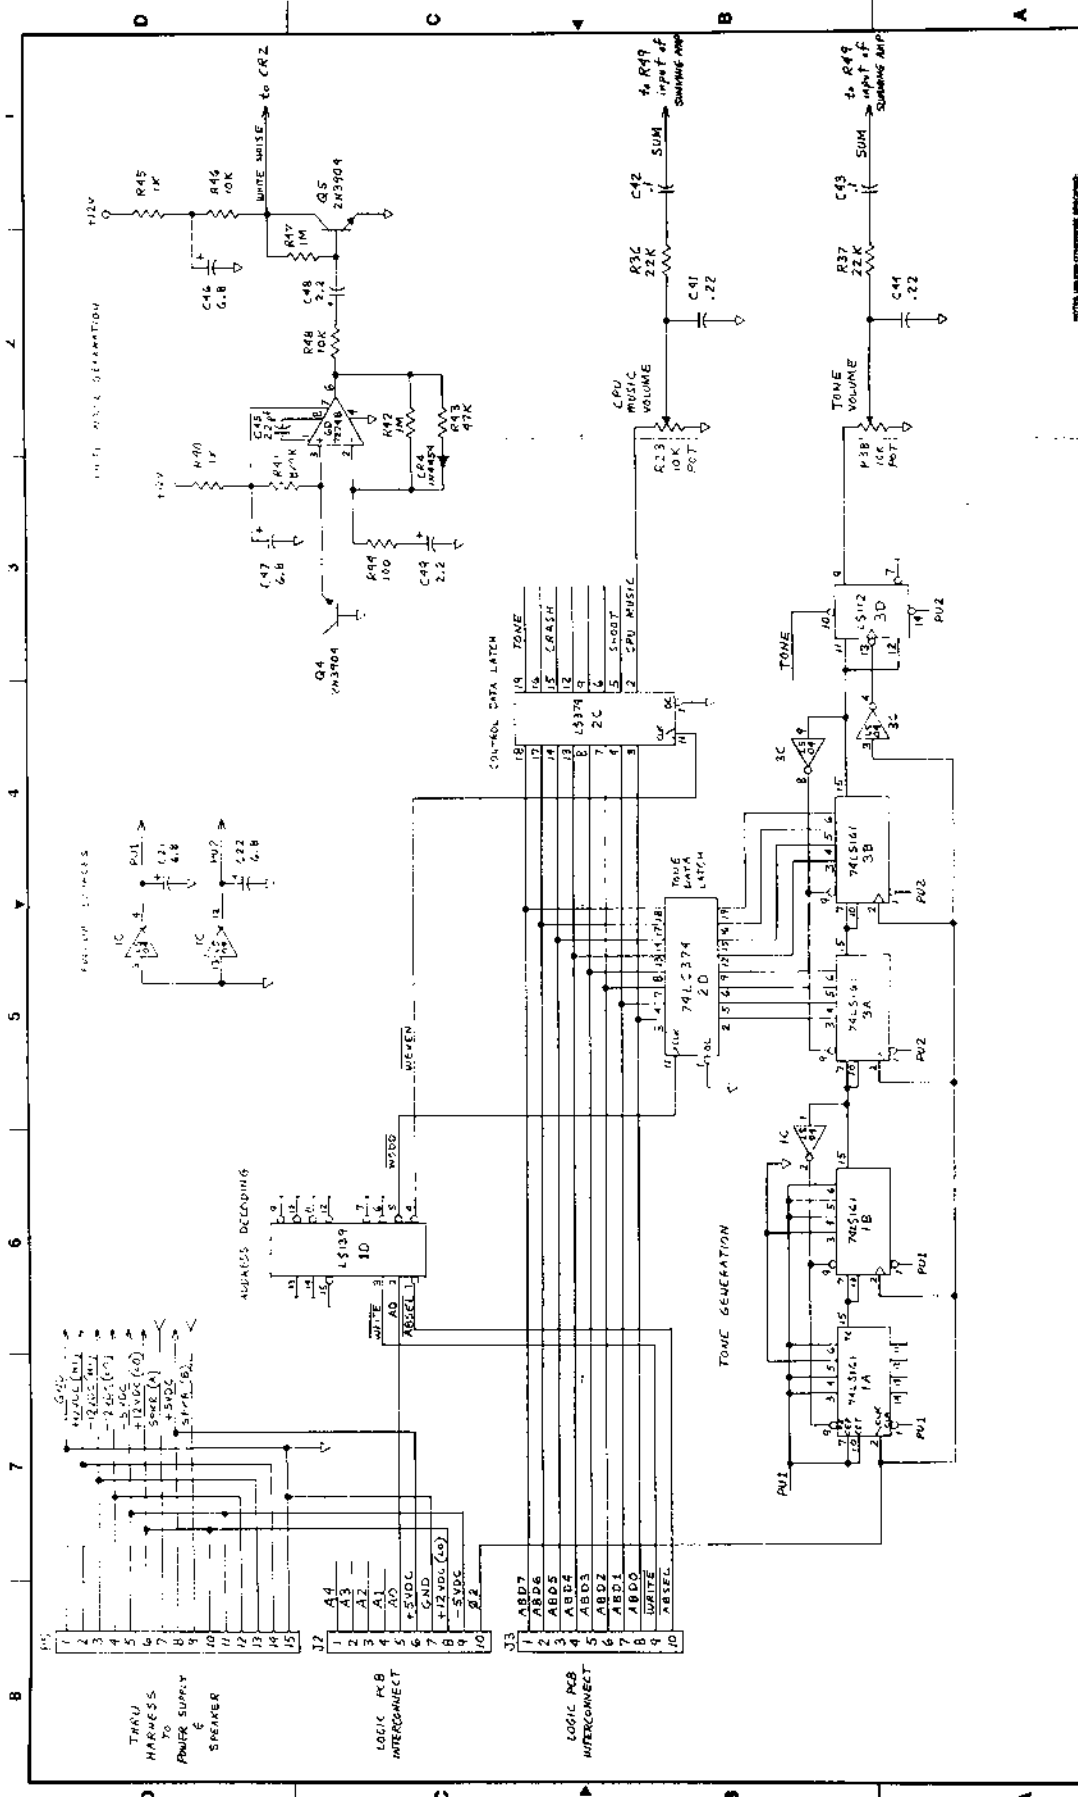

REV	DATE	BY	CHKD	APP'D	DESCRIPTION
1	11-11-80	AKB	AKB		INITIAL DESIGN
2	11-11-80	AKB	AKB		REVISED TO ADD TONE GENERATION
3					
4					
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					
16					
17					
18					
19					
20					
21					
22					
23					
24					
25					
26					
27					
28					
29					
30					
31					
32					
33					
34					
35					
36					
37					
38					
39					
40					
41					
42					
43					
44					
45					
46					
47					
48					
49					
50					
51					
52					
53					
54					
55					
56					
57					
58					
59					
60					
61					
62					
63					
64					
65					
66					
67					
68					
69					
70					
71					
72					
73					
74					
75					
76					
77					
78					
79					
80					
81					
82					
83					
84					
85					
86					
87					
88					
89					
90					
91					
92					
93					
94					
95					
96					
97					
98					
99					
100					

77-3376-11

SPECTAR AUDIO PCB SCHEMATIC

DATE: 11-11-80

BY: AKB

CHKD: AKB

APP'D: AKB

DATE: 11-11-80

BY: AKB

CHKD: AKB

APP'D: AKB

## AUDIO BOARD

### 1. Shoot Sound Generation (5A, 4A)

Both segments of timer 5A are configured to act as free-running multivibrators. The segment on the right receives, as control voltage input, the pseudo-triangle wave created by the charge and discharge of the RC network of the left segment. This creates, in the right segment, a frequency that increases and decreases at the rate of the triangle wave rate. This effectively simulates reverberation.

This reverberated tone is then fed to amplitude modulator 4A, whose output amplitude is controlled by the voltage applied to pin 2.

Normally (in the quiescent condition) transistor Q1 is in a saturated state, holding 4A pin 2 at a level just under 6 volts. This prevents any audible output from 4A. When signal SHOOT is enabled (set high), transistor Q1 is cut off due to the base being dragged low. This drops the voltage on 4A pin 2 low causing the output amplitude of 4A to increase, creating the player firing sound. Note that both the leading and trailing edge of this amplitude-modulated tone package are made gradual (sloping) due to (for the leading edge) the discharge time of C60, and (for the trailing edge) the discharge time of C14.

### 2. Explosion/Crash Sound Generation (Q3)

Normally (quiescent condition) transistor Q3 is not base-biased to conduct, therefore the white noise applied to the cathode of CR2 is never passed through the circuit. When signal CRASH is enabled (set high), C35 is allowed to charge through CR1 and R25 toward +12v. As this voltage increases, the base of Q3 receives increasing current and begins to pass the white noise.

This circuit is configured to act as an active filter, so the frequencies passed are only those selected for a reasonable crash or explosion sound.

The trailing edge of the explosion/crash decays slowly when signal CRASH is disabled (set low) since the discharge path for C35 is through a relatively high resistance (R24).

Output of this circuit is also then routed to the input of the summing amp.

### 3. Summing Amplifier and Integrator (5B)

Two segments of an LM324 operational amplifier are used here. The first is configured as a summing amplifier. It is the common point at which all the various sounds are algebraically added to become one signal. This signal is the composite of all individually developed sounds. This is also the location of the master volume control (R22).

### 4. Audio Amplifier (6A)

The final audio amplifier is a single IC (6A), configured as a bridge amplifier. The composite audio signal is applied to the input of one of the two internal segments and the output swings in accordance with the input signal. The feedback on this segment is not only fed back to the inverting input of the same segment, but is also applied to the inverting input of the other segment. This creates a condition wherein one segment swings positive, and the other segment simultaneously swings in a negative direction, creating an output twice the voltage of a single segment.

Note three types of audio amplifier IC's may be found in this position. All are identical except for the total power output and pinout. They are LM377 DUAL 2W, LM378 Dual 4W, and LM 379 Dual 6W.





## COLOR ADAPTER BOARD

### 1. Character Generator RAM Division (1A, 2A)

The combination of flip-flop 1A and decoder 2A divides the character generator RAM into 4 equal segments, using the uppermost 2 address lines from that circuit (VD7A09, VD7A10) and the composite video signal (5CV1D).

The resulting 4 video lines are then applied to the input of the priority encoder at 2B.

### 2. Video Prioritization (2B)

All video outputs from the Logic Board are applied to priority encoder 2B. As mentioned in the discussion of "Character Generator RAM Division", above, the single character generator output has here been separated into 4 different lines, each carrying the video imagery stored in a different quadrant of character generator RAM. These four lines are applied to the priority encoder along with the video output lines from Moving Object 1, Moving Object 2, and signal 5LINES, not used for SPECTAR.

As shown on the schematic, the input prioritization is from top to bottom. That is, highest priority is assigned to the input shown at the top (5MO1VID) and the lowest to the input at the bottom. The lowest in this case is actually tied low in order to be always active, which creates the background color.

The code present on the output of 2B indicates the number of the highest priority video line active at that time. This code is then applied to the Color Multiplexers to select the appropriate RGB output code for that video imagery.

### 3. Color Multiplexers (5A, 5B, 5C)

Each of these multiplexers generates the final video output for a particular base color: red, green, or blue.


The priority code from 2B is applied to the multiplexer select lines. This causes all multiplexers to simultaneously output data according to the priority code, and output the data from a particular input pin. The data on each input pin is set up by jumper configuration. Thus, in parallel, 5A, 5B, and 5C consider two factors when outputting RED, GREEN and BLUE data: the code of the highest priority video present, and the associated jumper configuration establishing the color of the video.

### 4. SYNC and VIDEO Polarity (JPR1, JPR2)

Exclusive OR gates 6A and 1C have here been configured to act as "selectable inverters". Cut the VID jumper (JPR1) and the output video is inverted to become negative true. The same occurs with the SYNC jumper (JPR2). Note that composite sync is available as well as separate Horizontal and Vertical sync outputs. When JPR2 is cut, it inverts all three sync outputs.

### 5. Output Level Adjustments (6C, 7A, 7C)

The only time these inputs are used is with a monitor requiring unusual input levels. They are not used on SPECTAR.

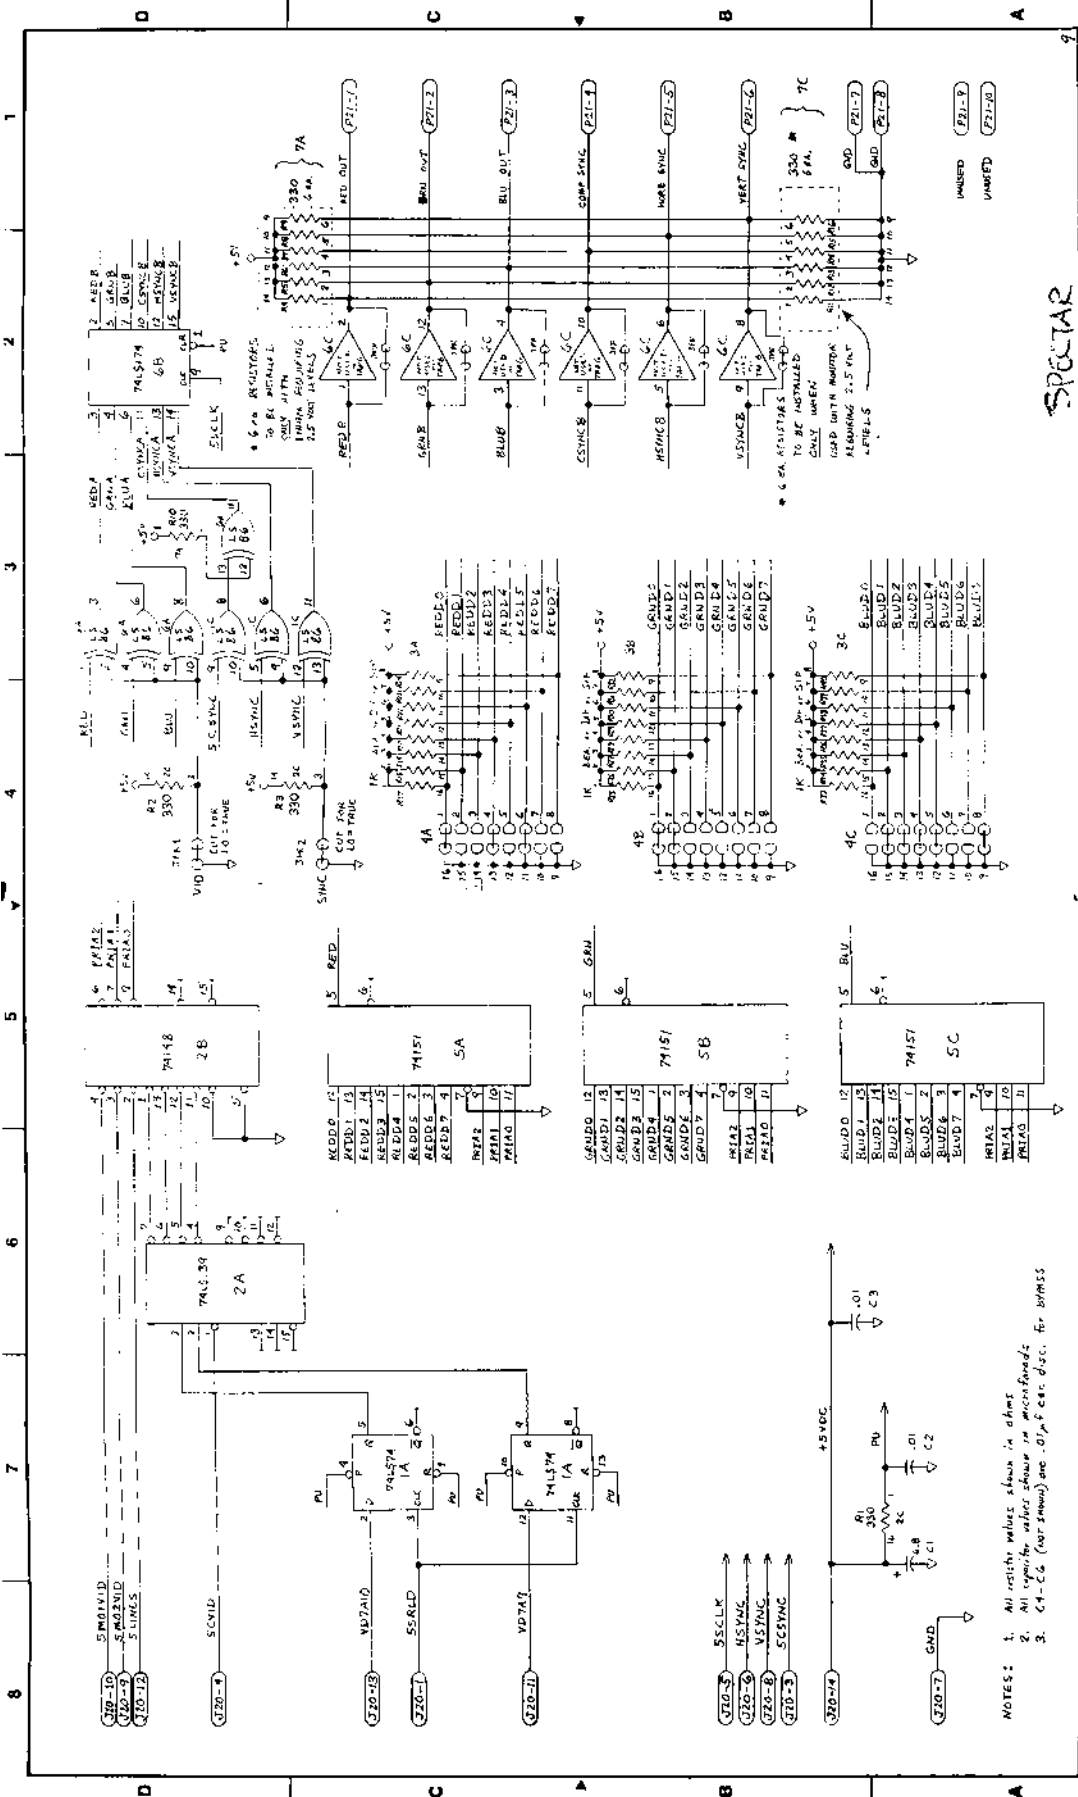

NOTES: 1. All resistors unless shown in ohms.  
 2. All capacitors unless shown in microfarads.  
 3. C4-C6 (varistors) see 0124 etc. disc. for DIMISS.

REV. 1	DATE 4/24/80	DESIGNER ORB	DATE 11/13/80	REV. 1	DATE 4/24/80	DESIGNER ORB
REV. 2	DATE 4/24/80	DESIGNER ORB	DATE 11/13/80	REV. 2	DATE 4/24/80	DESIGNER ORB
REV. 3	DATE 4/24/80	DESIGNER ORB	DATE 11/13/80	REV. 3	DATE 4/24/80	DESIGNER ORB
REV. 4	DATE 4/24/80	DESIGNER ORB	DATE 11/13/80	REV. 4	DATE 4/24/80	DESIGNER ORB
REV. 5	DATE 4/24/80	DESIGNER ORB	DATE 11/13/80	REV. 5	DATE 4/24/80	DESIGNER ORB
REV. 6	DATE 4/24/80	DESIGNER ORB	DATE 11/13/80	REV. 6	DATE 4/24/80	DESIGNER ORB
REV. 7	DATE 4/24/80	DESIGNER ORB	DATE 11/13/80	REV. 7	DATE 4/24/80	DESIGNER ORB
REV. 8	DATE 4/24/80	DESIGNER ORB	DATE 11/13/80	REV. 8	DATE 4/24/80	DESIGNER ORB
REV. 9	DATE 4/24/80	DESIGNER ORB	DATE 11/13/80	REV. 9	DATE 4/24/80	DESIGNER ORB

77-3373-11

COLOR ADAPTER PCB

602 Based VIDEO GAME

602 Based VIDEO GAME

602 Based VIDEO GAME

APPENDIX A  
PARTS LIST FOR SPECTAR

### Control Panel Assembly

<u>Part Number</u>	<u>Description</u>
68-2033-13	control panel
75-5177-10	control panel PSA polycarb silkscreen overlay
72-3022	switch pushbutton with nut and washer
38-5076-10	control 4-way joystick, long assy.
38-5044-10	Midway white pushbutton switch assy.
74-5247	carriage bolts 10/24 x 5/8 L black full thread
74-6506	kepnut 10/24
71-2391	control panel harness

### Universal Power Supply Assy

<u>Part Number</u>	<u>Description</u>
78-3001	+5VDC Power Supply 6AMP
63-4028	aux. transformer T911
or	
63-4025	aux. transformer T893
or	
63-4035	MFG pin 773P9
77-3365-15	power supply PCB Assy.
71-2389-10	power supply harness
76-1211-10	power supply mounting board
74-3503	screw, #6x1/2 l phillips pan head selftap
74-5198	screw, #6-32x 3/4 pan hol. phil. machine
74-3502	kepnut 6-32
74-3500	washer #6 Amer. std plain
74-4604	hex nut 8-32 nylon
61-8072	butt splice, blue
61-8056	plug, 2 pin molex
61-8054	pins, male molex
88-4002	tie wrap, small
88-4001	tie wrap, large
88-4028	wire, 22 ga. buss-uncoated
88-4008	solder SN60 .03 dia. 58 core
88-4011	flex mask and mold seal

### American Standard Double Coin Door

<u>Part Number</u>	<u>Description</u>
66-4003	Std. double coindoor, Vendall
66-4007	25 cent Amer. coin acceptor
	Coin door key (supplied w/ 66-4003)
71-2390	Universal coin door harness
64-2000	coin meter
88-4002	tie wrap, small
61-8313	butt splice red
74-3502	6-32 kepnut

### British/Australian Coin Door

<u>Part Number</u>	<u>Description</u>
66-4013-10	Std. British/Aust. dbl. coindoor w/ 10P/50P Coin door key supplied w/ 66-4013-10
71-2417	Aux. coin harness
64-2000	coin meter
61-8313	butt splice red
71-2390	univ. coin door harness
74-3502	6-32 kepnuts

### Pushbutton Assy

<u>Part Number</u>	<u>Description</u>
72-3061	switch assy.
72-3062	push button
74-0203	pal nut

### Spectar Speaker Assy

<u>Part Number</u>	<u>Description</u>	<u>Reference Location</u>
62-7061	6" x 9" oval speaker	
61-8056	conn. 2 pin male molex 03-09-2022	P4
61-8054	pins, male molex 02-09-2118	

### Monitor Isolation Transformer Assy.

<u>Part Number</u>	<u>Description</u>	<u>Reference Location</u>
FR 63-4029	Isolation transformer Midwest 773P7	
61-8058	Molex connector 03-09-2032	AC INPUT 22
61-8054	male molex pins 02-09-2118	P22
61-8057	molex connector 03-09-1023	AC to Monitor J23
61-8055	female molex pins 02-09-1118	J23
76-1212-50	XFMR mounting board	
71-2001-14	xfmr harness	
61-8072	butt splice blue	
74-6402	washer, #10 plain	
74-6506	kepnut 10-24	
74-5463-01	screw, 10-24 x 1" ph phil mach	
74-5165	fender washer 1/4 ID 1 1/4 OD	
88-4002	tie wrap small	
61-8313	butt splice red	

### Audio PCB Assembly

<u>Part Number</u>	<u>Description</u>	<u>Reference Location</u>
48-2321	74LS139, IC	1D
48-2314	74LS374, IC	2C, 2D
48-2071	74LS112, IC	3D
48-2308	74LS161, IC	1A, 2A, 1B, 3B, 3A
48-2210	72748, IC	6D
48-2342	LM324	5B
48-2212	NE 556	5A
48-2221	MC 3340	4A
48-2211	LM379 (Dual 6W Audio Amp National)	6A
48-2015	7407	4C
48-2302	74 LS04	1C, 3C
47-3005	2N 3904, trans	Q1, Q3, Q4, Q5
46-3030	IN 4454, trans	CR2, CR3, CR4, CR1
59-5110	resistor, 2.2K 1/4 w 5%	R7
59-5100	resistor, 3.3K 1/4 w 5%	R14
54-5021	potentiometer, 100K	R35
54-5019	potentiometer, 10K	R1, R22, R38
59-5070	resistor, 22K 1/4w 5%	R19, R31, R32, R37
59-5125	resistor, 1K 1/4w 5%	R33, R40, R45, R13
59-5163	resistor 820K 1/4w 5%	R41
59-5025	resistor 1 meg omega 1/4 w 5%	R9, R16, R17, R42, R47
59-5055	resistor, 47K 1/4 w 5%	R43
59-5080	resistor, 10K 1/4 w 5%	R12, R34, R46, R48
59-5140	resistor, 100K omega 1/4w 5%	R44
59-5069	resistor, 120K 1/4w 5%	R4, R24
59-5050	resistor, 68K 1/4w 5%	R3
59-5120	resistor, 1.2K 1/4w 5%	R2, R25, R5
59-5095	resistor, 4.7K 1/4w 5%	R21, R49, R6
59-5045	resistor, 100K 1/4w 5%	R28, R15
59-5040	resistor, 150K 1/4w 5%	R26
59-5030	resistor, 560K 1/4w 5%	R27
59-5065	resistor, 33K 1/4w 5%	R18, R39
23-4030	cap, .22 uf ceramic disk	C44
23-4035	cap .1 uf ceramic disk	C9, C12, C17, C31, C34, C37, C43
23-4015	cap, 6.8 uf 25v dip. tant.	C14, C21, C22, C40, C46, C47
21-4020	cap, 2.2 uf 15v dip. tant.	C48, C49
23-4070	cap, 22pf. ceramic disk	C45

### Audio PCB Assembly (continued)

<u>Part Number</u>	<u>Description</u>	<u>Reference Location</u>
23-4060	cap, .001 uf ceramic disk	C11
23-4050	cap, .01 uf ceramic disk	C1, C2, C3, C4, C6, C7, C8, C16, C24, C25, C27, C23, C30, C33, C38, C39 C19, C20 C15, C10, C60
21-4010	cap, 33 uf 25v dip tant.	
22-4025	cap, .47 uf 25v dip. tat.	
61-8042	conn., 10 pin female	J2, J3
68-3041	heat sink, thermalloy 6072	6A (use only w/ LM 379
22-4032	caps, 10 uf Radial tant or mini electro 25V	C14, C5
74-2506	screw, 4-40 x 1/4" machine	6A heatsink
72-3025	dip pkg. shunt 16 pin AMP Part # 435704-8	6B
74-5065	standoff 6-32 x 5/8" nylon	
or		
74-5075	standoff 6-32 x 1/2" nylon	
77-3371	Spectar, audio (bare) PCB	
74-5182	6-32 x 1/4 machine screw	

### Universal Power Supply PCB

<u>Part Number</u>	<u>Description</u>
77-3365-14	printed circuit board
20-4000	4000 uf 50 v axial lead capacitor
21-4010	33 uf 25 v dip tantalum capacitor
21-4015	6.8 uf 35v dip tantalum capacitor
46-3016	60si diode
47-3004	mda 970-1 bridge rectifier
47-3041	"N3055 transistor
47-3011	2N6246 transistor
48-2337	7905T negative 5v LM320T-5 regulator
48-2217	7912T negative 12v LM320T 12 regulator
48-2338	7812T positive 12v LM340 T-12 regulator
68-3041	thermalloy 6072 heat sink
69-2038	thermalloy 6015 heat sink
61-8010	12 pin male molex
74-2514	4-40 x 3/8 phillips pan head machine screw
74-5216	#4 flat metal washer
74-5191	#4-40 kep nut



6502 Game Logic PCB Assembly

<u>Part Number</u>	<u>Description</u>	<u>Reference Location</u>
48-2000	IC 7400	3D, 15H
48-2005	IC 7402	1H, 6H
48-2010	IC 7404	1D, 3F, 4D, 10F, 11F
48-2015	IC 7407	2C
48-2020	IC 7408	5E
48-2332	IC 74LS11	3H
48-2035	IC 7420	2F
48-2316	IC 74LS21	12F, 15E
48-2045	IC 7427	7F, 2H
48-2055	IC 7432	6F
48-2067	IC 7474	1C
48-2071	IC 74LS112	2E, 6E
48-2307	IC 74LS138	5B, 5D
48-2321	IC 74LS139	7E, 16H
48-2090	IC 74157	14A, 14E
48-2095	IC 74161	1E, 2D, 4F, 5F
48-2100	IC 74166	12B, 12D, 13D, 14D, 15D
48-2115	IC 74193	10E, 12E, 13F, 15F 14F, 16F, 11E, 13E
48-2328	IC, 74LS241	8C, 1A, 3A 3B, 4H, 6B, 7D, 9B, 9E, 15A
48-2350	IC 74LS245	3C, 4C, 6C 15B, 13B
48-2314	IC 74LS374	1F, 14B, 7C, 8E
48-6502	microprocessor 6502	2A
48-2334	2114 (1K x4) RAM	4A, 5A, 7B, 8B, 11C, 12C 13C, 14C
48-9125-01	2708 EPROM (1K x 8) HRL 11D-1	11D
48-9099-01	6331 PROM (.32 X 8)	6D
48-9099-02	6331 PROM (.32 X 8)	14H
48-9144	6301 PROM (256 X 4)	5C
46-3025	IN4002 diodes	8E, 9E, 2H
59-5135	res. 470 omega 1/4 w 5%	1D, 2H
59-5120	res., 1.2K 1/4w 5%	2C
59-5115	res., 1.8K 1/4w 5%	1C, 2C
59-5110	res., 2.2K 1/4w 5%	7E, 2A
59-5105	res., 2.7K 1/4W 5%	1C, 2C
51-0003	res., 220 omega 1/4w 5% 10 pin sip	9E
51-0002	res., 2.2K 1/4w 5% 10 pin sip	16A
51-0001	res., 4.7K 1/4w 5% 10 pin sip	15A

6502 Game Logic PCB Assembly (continued)

<u>Part Number</u>	<u>Description</u>	<u>Reference Location</u>
51-0004	res., 6.8K 1/4w 5% 10 pin sip	14A
23-4033	cap, .01 uf ceramic disc	1D
23-4035	cap, .1 uf ceramic disc	A/R per assy drawing
21-4015	cap, 6.8 uf 25v tant. dip	1C, 6E, 15D, 13F
20-4014	cap, 33 uf 25v electrolytic	IC 2C
20-4005	cap, 470 uf 10v electrolytic	10H
72-3025	dip shunt jumper paks 16 pin	4B, 10D, 11B
72-3042	dip switch 8 pos.	16A
45-3036	crystal, 11.289	1D
61-8041	connector 10 pin molex	16C, 16E
61-8062	dip sockets 16 pin low profile	5C, 6D, 14H
77-3374	print. circuit board	
61-8045	dip socket 24 pin low profile	11D, 6A, 7A, 8A, 9A, 10A, 11A
61-8035	dip socket 40 pin low profile	2A
61-8060	dip socket 14 pin low profile	16B
61-8157	dip socket 18 pin low profile	4A 5A 7B 8B 11C 12C 13C 14C
21-4021	cap, 1 uf 25V dip tant	C45, C52
49-5138	res, 220 v 1/4 w 5%	R200, R311 at 5D
59-5064	res, 18ohm 1/4w 5%	R300-R308
23-4067	cap, 330 pf cer. disk	5D
48-9143-01	2716 EPROM programmed SPL6A-1	
48-9143-02	2716 EPROM programmed SPL7A-1	
48-0143-03	2716 EPROM programmed SPL8A-1	
48-9143-04	2716 EPROM programmed SPLA9A-1	
48-9143-05	2716 EPROM programmed SPL10A-1	
48-9143-06	2716 EPROM programmed SPL11A-1	

6502 Color Adapter PCB Assembly

<u>Part Number</u>	<u>Description</u>	<u>Reference Location</u>
48-2080	IC 74151	5A, 5B, 5C
48-2305	IC 74LS74	1A
48-2321	IC 74LS139	2A
48-2079	IC 74148	2B
48-2341	IC 74LS86	IC 6A
48-2333	IC 74LS174	6B
20-4015	6.8 uf dipped tantalum capacitor	C1
59-5136	resistor 330 omega 1/4 w 5%	R1 thru R10
59-5103	9 pin sip resistor pac 1K omega	3A, 3B, 3C
23-4033	.01 uf ceramic disc capacitor	C2 C4 C5 C6
61-8203	10 pin male molex connector	P2
61-8127	14 pin socket stan profile w/ lock	J1
77-3373-14	printed circuit board	